


折后，英语在前 正反面印刷



2-Bay Battery Power Station
Product Manual
English


Attention

Thank you for purchasing Aputure 2-Bay Battery Power Station, please read the user manual before using. To avoid unnecessary loss, please contact us when you have any question, we will offer you on-time assistance.

- Please check the package after you receive the parcel, product might be damaged if package is broken.
- Prevent the product from being deformed, otherwise it will lead to the damage of electrical parts.
- Please don't dismantle the product housing so as to avoid unexpected trouble.


The Introduction Of Product

V-Mount

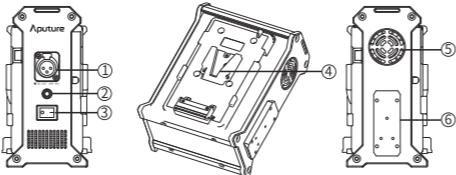

- ① Adapter Output
- ④ V-lock Plate
- ② Status LED light
- ⑤ Cooling fan
- ③ Function Option
- ⑥ Quick-Release Plate

Gold Mount

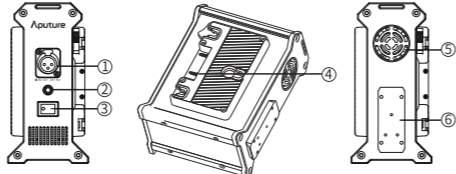

- ① Adapter Output
- ④ A-lock Plate
- ② Status LED light
- ⑤ Cooling fan
- ③ Function Option
- ⑥ Quick-Release Plate

Operation

- Put different batteries on the product with V-Mount or Gold Mount.
- Connect the fixture and lamp with the XLR Head Cable.
- The switch is adjusted to "-" position, the green indicator light is on, it has output, and the equipment can be powered through the XLR Head Cable; The switch is adjusted to "0" position, the green indicator light is off, and the output port is closed.

Technical Parameters

Battery Input	14.4V
Battery Output	48V, 10A, Max 480W
Operation Temperature	-10°C~40°C
Size	Gold Mount: 175*130*88mm V-Mount: 175*130*98mm
Weight	~1.3kg

* Different specifications of batteries (Port A / Port V) shall be used for the power supply boxes with different gusset plates.
* The required battery capacity will also be different, because of different products with different Power.

Service Warranty (EN)

Aputure Imaging Industries Co., Ltd. warrants the original consumer purchaser from defects in material and workmanship for a period of one (1) year after the date of purchase. For more details of warranty, visit www.aputure.com

Important: Keep your original sales receipt. Be sure the dealer has written on it the serial No. of the product. This information is required for warranty service.


This warranty does not cover:

- Products that are the result of misuse, abuse, accident (including but not limited to damage by water, faulty connection, defective or mislabeled associated equipment, or the use of the product with equipment for which it was not intended.
- Cosmetic defects that appear more than thirty (30) days after the date of purchase. Cosmetic damage caused by improper handling is excluded.
- Damage that occurs while the product is being shipped to whoever will service it.

This warranty is void if:

- The product identification or serial No. label is removed or defaced in any way.
- The product is serviced or repaired by any one other than Aputure or an authorized Aputure dealer or service agent.

Aputure Imaging Industries Co., Ltd.
Add: F73, Building 2, Longjun Industrial Estate,
East of Xixiang West Road, Shenzhen, Guangdong
Sales Contact: (86)0755-4326566-413



双路电池供电箱
使用者指南
中文


注意

感谢您购买爱图仕产品,使用前请仔细阅读说明书。在使用过程中遇到任何问题,请及时联系我们,我们会尽快提供帮助。

- 收到产品后,请检查包装是否完好,若包装破损,可能导致产品损坏;
- 请不要让产品受力变形,可能会导致电子元件或线路部分损坏,使产品不稳定;
- 请不要拆装外壳,以免给您带来不必要的损害。


产品介绍

V-Mount

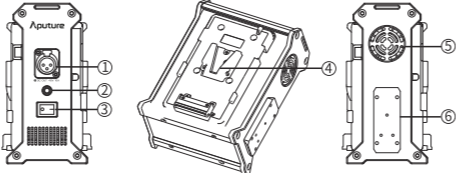

- ① 适配输出口
- ④ V口挂板
- ② 状态指示灯
- ⑤ 散热风扇
- ③ 功能选择开关
- ⑥ 快装板

Gold Mount

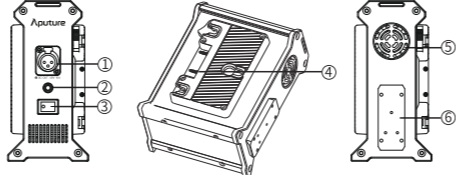

- ① 适配输出口
- ④ 安东口挂板
- ② 状态指示灯
- ⑤ 散热风扇
- ③ 功能选择开关
- ⑥ 快装板

操作说明

- 通过本产品的V-Mount/ Gold Mount连接不同规格的电池。
- 用配备的连接线连通设备与摄影灯具。
- 开关调节至“-”档,绿色指示灯亮,输出口有输出,可通过连接线给设备供电; 开关调节至“0”档,绿色指示灯熄灭,输出口关闭输出。

技术参数

电池输入	14.4V
电池输出	48V, 10A, Max 480W
工作温度	-10°C~40°C
尺寸	Gold Mount: 175*130*88mm V-Mount: 175*130*98mm
重量	约1.3kg

* 不同扣板的供电箱,应使用不同规格的电池(A口/V口)。
* 因不同产品的功率不同,需要配备的电池容量也会有差异。

保修条款(中文)

本公司对产品第一类主客户提供为期一年的质量保修期,质保内容如下,请仔细阅读:

重要说明: 请保留您购买单据及保修卡,确定您购买的供应商资料在此单据,同时包含您的购买日期,产品序列号等,这些资料是质保的重要依据。

质保范围不包括:

- 产品不当使用、损坏、意外、错误操作、不良或处理的外包装。
- 产品因非保修范围内原因造成的损坏(包括由于雨水等意外)不在此保修范围内。
- 因使用不当造成产品损坏,或是不当的表观处理导致损坏,或是在使用过程中,不在保修范围。
- 经销商造成损坏,不在保修范围。

质保无效说明:

- 产品保修期内因已经损坏或无法识别,本质保条款无效。
- 产品未经本公司授权指定授权维修公司的维修及改装,本质保条款无效。

Aputure Imaging Industries Co., Ltd.
Add: F73, Building 2, Longjun Industrial Estate,
East of Xixiang West Road, Shenzhen, Guangdong
Sales Contact: (86)0755-4326566-413