



Quick Start Guide

2/4-Port 4K KVMP Switch with HDMI®
Connection, USB 3.0 Hub, and Audio Mixer

GCS1932H/GCS1934H
PART NO. Q1644 / Q1645

Package Contents

1

GCS1932H

- 1 x GCS1932H
- 2 x HDMI Cables
- 2 x USB 3.0 Cables
- 2 x Audio Cable Sets
- 1 x Power Adapter
- 1 x Quick Start Guide
- 1 x Warranty Card

GCS1934H

- 1 x GCS1934H
- 4 x HDMI Cables
- 4 x USB 3.0 Cables
- 4 x Audio Cable Sets
- 1 x Power Adapter
- 1 x Quick Start Guide
- 1 x Warranty Card

System Requirements

Console:

- HDMI monitor
- Standard wired USB keyboard
- Standard 3-button wired USB mouse
- Speakers(optional)

Computer:


- 1 x HDMI port
- USB Type-A port
- Audio port (optional)

Operating Systems:


- Windows® 2000, Vista, 7, 8.1, 10
- Mac OS X 9.0+
- Linux®, UNIX, and other USB supported systems

Overview

GCS1932H Front View

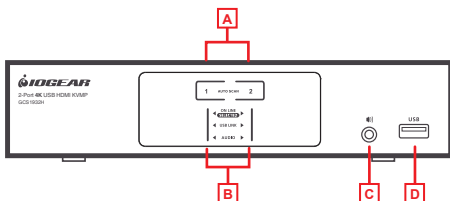


GCS1932H Rear View

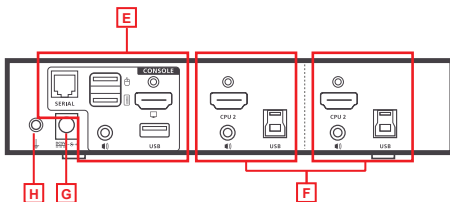


- A. Port selection pushbuttons
- B. Port LEDs
- C. Audio Port
- D. USB 3.0 Hub
- E. Console Ports
- F. KVM Ports
- G. Power Jack
- H. Ground Terminal

GCS1934H Front View

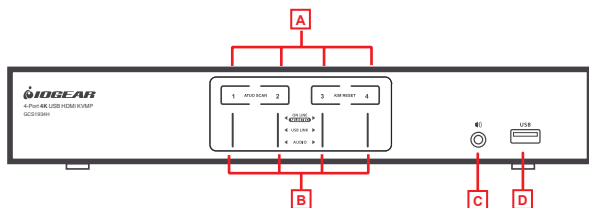


GCS1934H Rear View

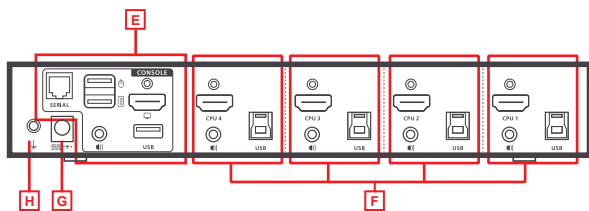


1. Ground the GCS1932H/GCS1934H by connecting one end of a grounding wire to the grounding terminal, and the other end of the wire to a suitable grounded object
2. Connect the USB keyboard and mouse to the GCS1932H/GCS1934H console ports
3. Connect the HDMI monitors to the GCS1932H/GCS1934H console ports
4. Turn the monitor power to ON
5. Connect the speaker into the GCS1932H/GCS1934H speaker jack located on the front side panel.
6. Connect the secondary speaker into the GCS1932H/GCS1934H speaker jack located on the rear side panel.
7. Connected the HDMI connectors into any available HDMI ports in the KVM Port section. Connect the USB and speaker connectors into the GCS1932H/GCS1934H. Connect the other end of the KVM cables to their respective HDMI, USB, and speaker ports on the computers.
8. Connect up to 2 USB peripherals into the USB 3.0 Type-A ports (front and rear panel of the GCS1932H/GCS1934H)
9. Connect the power adapter to an AC power source. Then, connect the power adapter cable to the GCS1932H/GCS1934H power jack.
10. Turn all connected computers power to On

Hardware Installation


GCS1932H Rear View

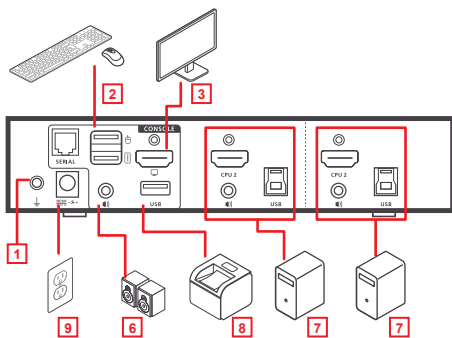


GCS1932H Front View

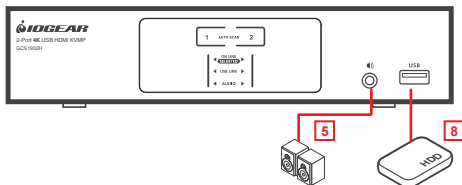

GCS1934H Rear View

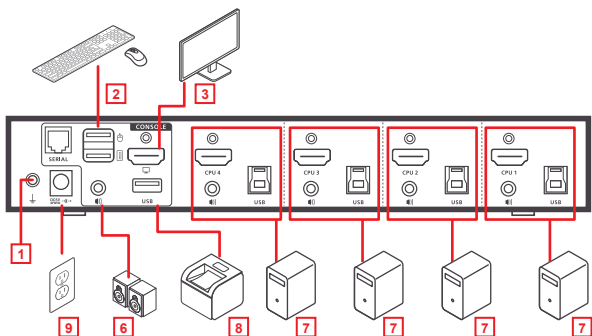

GCS1934H Front View

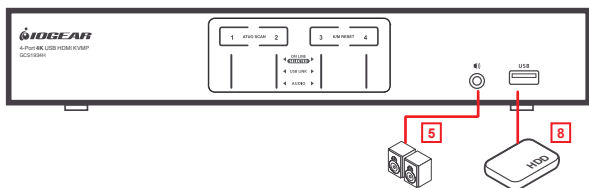

Switch Operation

Switching between connected computer sources:

- a. Manual – involves pressing the port selection pushbuttons located on the GCS1932H/GCS1934H's front panel.
- b. Hotkey – involves entering combinations from the keyboard (list of complete Hotkey Settings is available in the manual, located on our website).
- c. Mouse – involves clicking the mouse wheel button twice to switch between ports. Please make sure mouse and mouse wheel button emulation are turned ON (List of complete Hotkey Settings is available in the manual, located on our website)

For a list of complete Hotkey Settings, please visit our website for updated manuals:

www.iogear.com/product/GCS1932H

www.iogear.com/product/GCS1934H

EMC Information

FEDERAL COMMUNICATIONS COMMISSION STATEMENT:

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Warning: Operation of this equipment in a residential environment could cause radio interference.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

CE Statement

This device has been tested and found to comply with the following European Union directives: Electromagnetic Capability (2014/30/EU) and Low Voltage (2006/95/EC).

⚠WARNING: This product may expose you to chemicals including Cadmium which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov

Limited Warranty

This product carries a 3 Year Limited or Lifetime Warranty. For the terms and conditions of this warranty, please go to <http://www.iogear.com/support/warranty>

Register online at <https://www.iogear.com/register>

Important Product Information

Product Model _____

Serial Number _____

Contact

WE'RE HERE TO HELP YOU!

NEED ASSISTANCE SETTING UP THIS PRODUCT?

Make sure you:

1. Visit www.iogear.com for more product information
2. Visit www.iogear.com/support for live help and product support

IOGEAR

iogear.custhelp.com

support@iogear.com

www.iogear.com