

1. Package Including

Baseus Security H1 HomeStation


H1 HomeStation×1(Model: S1UA00)
Power Adapter×1
100Mbps Ethernet Cable×1
Screw Pack×1

Baseus Security S1 Pro Outdoor Dual Camera


S1 Pro Camera × 2 (Model: S0SU00)
Camera Charging Cable×1 (USB-A to USB-C)
Screw Mount×2

2. Product Overview

① H1 HomeStation

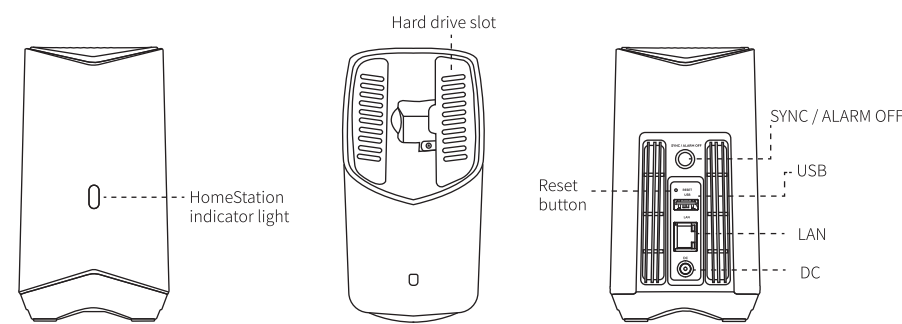


② S1 Pro Camera

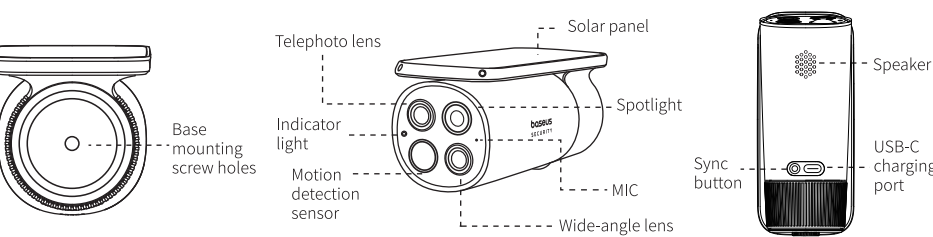

01


3. Setup Instructions

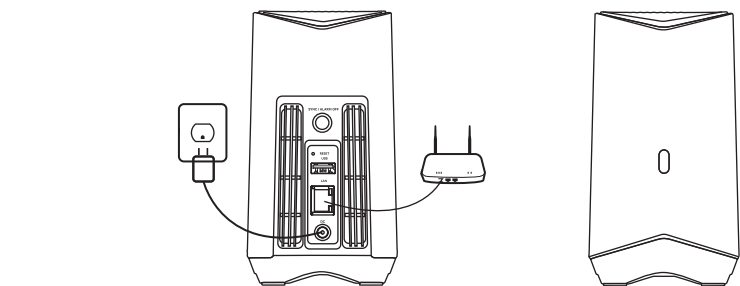

① Turn on the H1 HomeStation and connect it to your router. When the LED light turns blue, it means the H1 HomeStation is ready for setup (this will take approximately 1 minute).



② Download and install the baseus Security APP, and register an account.

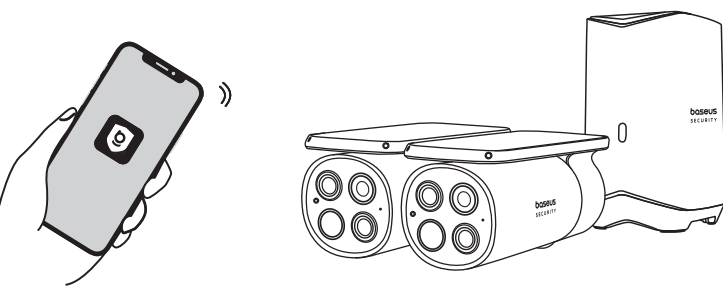

③ Follow the instructions on the screen to add the H1 HomeStation and the camera to your device list.



02

4. Camera Charging

*Please fully charge both cameras before first use. It takes about 8 hours to charge each camera.

Charge Indicator Instructions

- ① Blue light flashes slowly: in charging.
- ② Indicator light goes out: fully charged.

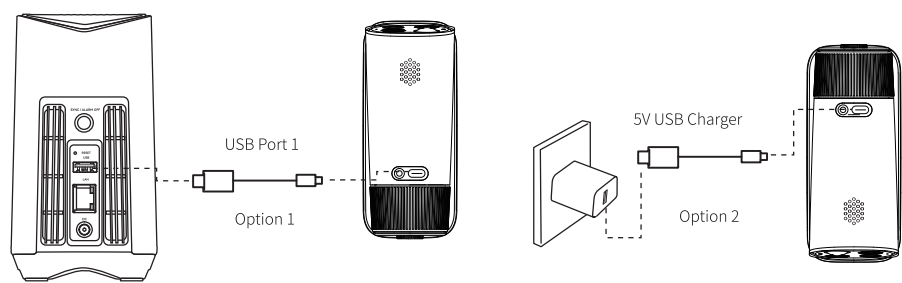

S1 Pro Outdoor Dual Camera is equipped with a solar panel featuring an advanced sun-powered tracking system*. This innovative system efficiently converts sunlight into electrical energy, ensuring the battery is continuously charged. Should the battery level drop, it typically results from limited sunlight or increased power usage. There's no need for manual cable charging unless you receive a low battery alert.

*The solar panel, equipped with Baseus Security's patented sun-powered tracking system, rotates to maximize sunlight absorption. To ensure safety and functionality, maintain adequate space around the panel at all times, preventing contact or collisions with nearby objects during its operation.

03

5. Camera Installation




- ① Choose a location where you can get the ideal viewing angle. We recommend to mount the camera 7-10 feet (2-3 meters) above the ground. Recommended installation area:
 - exterior wall without eaves;
 - over the eaves, under 10 feet (3 meters);
 - any poles or fences where the sunlight is not blocked.



② Turn the knob of the mounting bracket counterclockwise to loosen and remove it.

③ Drill holes with a 15/64-inch (6 mm) drill bit and insert expansion bolts into the holes; using expansion bolts is necessary for walls made of hard materials such as concrete, brick, or stucco.

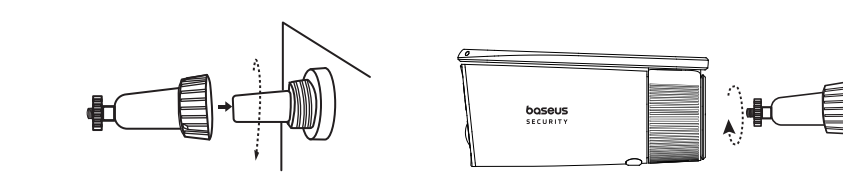

④ Screw the knob of the mounting bracket firmly into the mounting hole.

⑤ Hold and screw the camera onto the mounting bracket. Rotate the camera to adjust the viewing angle and check the footage with the live stream in the Baseus Security APP.


*For troubleshooting, check out the help in the baseus Security APP. See the application page for LED indicator status.

04

baseus
SECURITY

QUICK START GUIDE

Baseus Security S1 Pro Outdoor Dual Camera 3K 2-Cam Kit

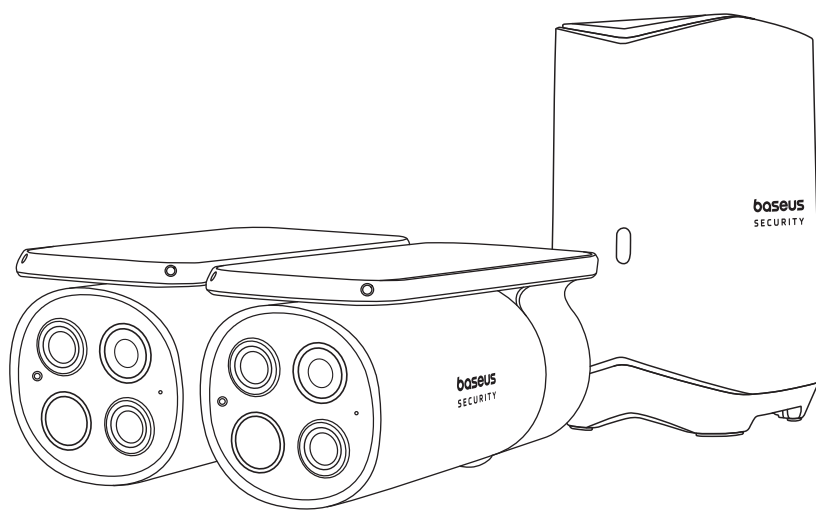

6. Expandable Local Storage (Optional)

The H1 HomeStation has 16GB storage built-in, and it supports storage expansion with external hard drives as well.

Prepare your hard drive



Your hard drive must meet the following requirements:

Type	Mechanical hard drive (HDD) or solid state drive (SSD) with SATA interface.
Size	2.5 inches
Capacity	16TB(Max.)
Recommending Brands	Western Digital, Seagate, SAMSUNG, Kingston, PNY, Crucial, SanDisk.

*Before adding a hard drive to the H1 HomeStation, please transfer all data on the hard drive to a safe location.

Install your hard drive

*The H1 HomeStation must be turned off when you install or remove the hard drive.

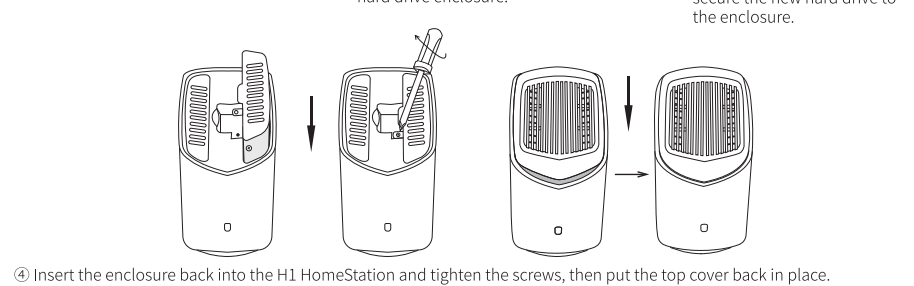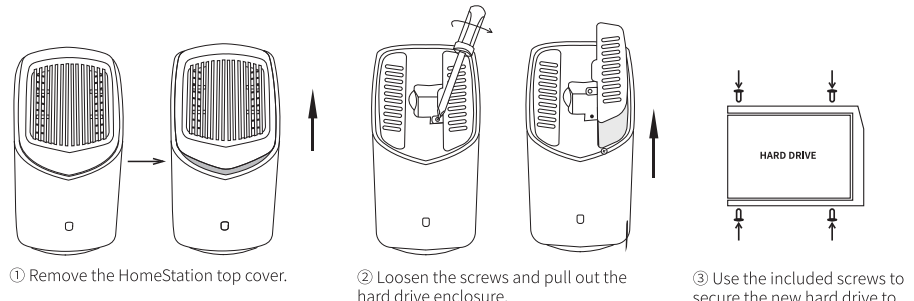

④ Insert the enclosure back into the H1 HomeStation and tighten the screws, then put the top cover back in place.

*You can expand your storage room after cutting off power to the HomeStation by following the steps above.

The new hard drive must be initialized through the Baseus Security APP for use with the H1 HomeStation.

05

- Reorient or relocate the receiving antenna. -- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radio Frequency Exposure Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in fixed/mobile exposure condition. The min separation distance is 20cm.

The following importer is the responsible party (for FCC matters only)

Company Name: BASEUS TECHNOLOGY (US) INC
Address: 421 S BROOKHURST ST SUITE 1312
ANAHEIM, CA 92804
Telephone: +6-145412699



This product complies with the radio interference requirements of the European Community.

Declaration of Conformity

Shenzhen Baseus Technology Co., Ltd. Declares that the product is in compliance with Directive 2014/53/eu. The full text of the EU declaration of conformity is available at the following internet address: <https://eu.baseus.com/pages/euro-compliance>.

RF exposure notice:

The Maximum Permissible Exposure(MPE)level has been calculated based on a distance of d=20cm between the device and the human body. To maintain compliance with RF exposure requirement, use product that maintain a 20cm distance between the device and human body.

Frequency bands and power are as below:

Model	Function	Operation Frequency	Max. RF Power
S0SU00	Wi-Fi	2412-2472MHz	EIRP 18.77dBm
S1UA00	Wi-Fi	2412-2472MHz	EIRP 17.26dBm

10.Customer Service

Warranty	24-month limited warranty
✉	support@baseussecurity.com
☎	United States Tel: +1(800)2208056 Monday to Friday 10:00 AM -6:00 PM (UTC-5)

Manufacturer: Shenzhen Baseus Technology Co., Ltd.
Add: 2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd,
Gangtuo Community, Bantian Street, Longgang District, Shenzhen
Hotline: +1 800 220 8056 Website: <https://www.baseus.com>

PBS184Z-POAO
0000000
Designed by Baseus
Made in China

Warning: Please follow the above safety instructions
otherwise it will cause fire, electric shock,
damage or other injuries.

7. Product Specifications

- ① H1 HomeStation
Input Power: 12V~2A (Max.)
USB-A Output: 5V~2A (Max.)
Ethernet Port: 100Mbps (Max.)
- ② S1 Pro Camera
Resolution: 2560 × 1440+2560 × 1440
Night Vision: color night vision
Input: 5V~2A (Max.)
Waterproof Rating: IP67

The above data are provided by the Baseus Lab; actual use will vary depending on the specific circumstances.

8. Notice

- The device is not a toy.
 - Choking Hazard: The product contains (or comes with) small parts, plastic elements, cables and parts that may cause choking hazard. Keep your camera and its accessories out of the reach of small children. Consult a physician immediately if small parts are swallowed.
 - Strangulation Hazard: Children get strangled in cords. Keep cords out of the reach of children (more than 3ft/0.9m away).
 - The suitable temperature for S0SU00 and accessories is - 20°C to 50°C (Charging temperature is 0°C to 40°C); The suitable temperature for S1UA00 and accessories is - 10°C to 40°C;
 - When charging, please place the device in an environment that has a normal room temperature and good ventilation.
 - Unless specifically indicated that it is safe to do so in the user guide or instruction manual, do not use this device in an environment that exceeds the recommended low or high temperature.
 - Unless specifically indicated that it is safe to do so in the user guide or instruction manual, avoid exposing your device to direct sunshine or excessively wet environments.
 - For pluggable equipment, the socket-outlet shall be easily accessible.
 - Use only the adapter provided by the manufacturer. Using unauthorized adapters may cause danger and violate the authorized use of the device or the warranty article.
- CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSES OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

9. Safety

- ✂ ✂ This symbol indicates that this product shall not be treated as household waste. Instead, it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. Follow local rules and never dispose of the product with normal household waste.

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

06

产品名称:OS-倍思 Security S1 Pro Kit Outdoor US 皓月白

产品型号:料号: 000000

方案编码: / 编码&版本: PB5184Z-P0A0

杨添 结构设计师:王廷兴

物料描述: 说明书\120g无荧光白牛皮\双面单色印刷\十字折\展开尺寸: 260*320mm 成型尺寸:130*160mm\ROHS

版本历史

版本	变更日期	变更描述
P0A0	2024-04-19	初始发行



温馨提示:请印刷供应商严格按照倍思的图纸印刷生产。如贵司有生产上的原因需要调整倍思图纸的字体、图形、颜色、刀模尺寸等,请务必通知倍思相关负责的包装设计师,并在征得包装设计师同意的情况下修改文档并发回存档。

切线 ————
折线 - - - - -

刀线图例

K