


BESTTEN[®]


Power for Today, Ideas for Tomorrow

Installation Instructions

15A Standard Decor Receptacle Outlet

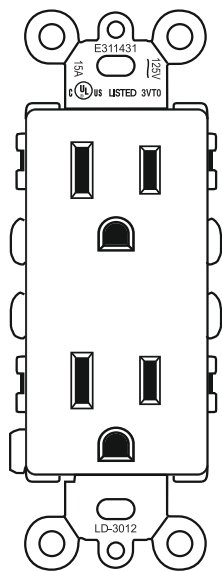

Model: LD-3012

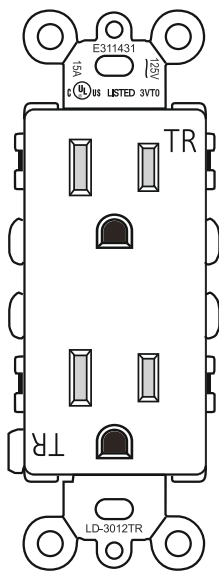

Model: LD-3012TR

SPECIFICATION

Rating	15 Amp, 125V, 60Hz
Side Wire	#12 AWG & #14 AWG
Push Wire	#14 AWG Only
AC Outlets	NEMA 5-15R
Certificate	UL/cUL Listed

! WARNINGS

TO AVOID FIRE, SHOCK, OR DEATH, TURN OFF THE POWER AT CIRCUIT BREAKER OR FUSE AND TEST THAT THE POWER IS OFF BEFORE WIRING!

To be installed and/or used in accordance with appropriate electrical codes and regulations. If you are unsure about the installation, please consult a qualified electrician.


Use this device only with copper or copper clad wire.

Risk of electric shock. Dry location use only.


INSTALLATION

1. Install in accordance with all electrical codes and standards.
2. Shut off power to outlet box.
3. Connect wires per **WIRING DIAGRAM** as follows:
BLACK (Hot) wire to BRASS screw, WHITE (Neutral) wire to SILVER screw, GREEN or BARE (Ground) wire to GREEN screw. Terminal screws accept up to #14 - #12 AWG copper or copper clad wire. Or insert #14 AWG solid copper wire only into wire holes.
4. Tighten every screw and ensure no bare conductors are exposed, 14 pound inch (1,6Nm) of torque.
5. Mount device in wall box with screws provided and mount wall plate.
6. Restore power at circuit breaker or fuse. Installation is complete.

Wiring Diagram

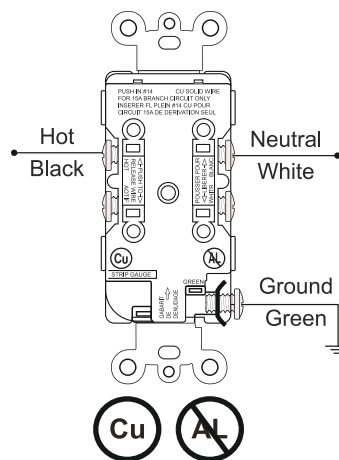

Directions for Breaking Off Terminal Fin for a Two Circuit Application



WARRANTY

BESTTEN warrants to the original customer that this product is free of defects in materials and workmanship for one year from the purchase date. Within this period, simply contact BESTTEN CARE with proof of purchase and reason of claim. We will replace the product for free.

Any product which is subject to misuse or accidental damage is excluded from this warranty.

support@ibestten.com

1-800-358-6160 (Mon-Fri 9AM-5PM PST)

