



Sku # 1009579015


Model # AL-HSNR-RGBWIC-16FT

USE AND CARE GUIDE

16.4ft RGBWIC DYNAMIC COLOR 360° OUTDOOR ROPE LIGHT

Pre-Installation

PACKAGE CONTENTS

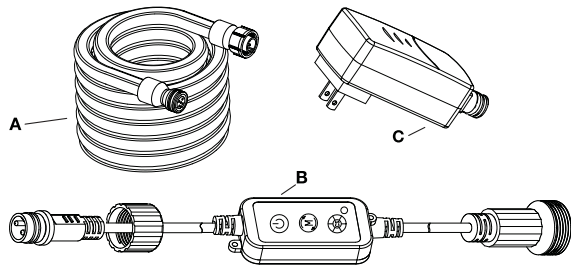

Part	Description	Quantity
A	Neon Rope Light	1
B	In-line Controller	1
C	Plug-in Power Adapter	1
D	Mounting Clips	10
E	Screws	10

Care and Cleaning

- Before attempting to clean the light strip, unplug the adaptor from the power outlet.
- To clean the light strip, use a clean, dry, or slightly damp cloth.
- Do not use any cleaners with chemicals, solvents, or harsh abrasives, as damage to the light strip may occur.
- Allow the light strip and components to dry thoroughly before plugging the power adaptor back into the outlet.

Warranty

2-YEARS LIMITED WARRANTY

The manufacturer warrants this lighting fixture against defects in materials and workmanship for a period of two years from the date of purchase. If within this period the product is found to be defective in material or workmanship, the product must be returned, with a copy of the bill of sale as proof of purchase, to the original place of purchase. The manufacturer will, at its option, repair, replace, or refund the purchase price to the original purchaser or consumer. This warranty does not cover light bulbs or the fixture becoming damaged due to misuse, accidental damage, improper handling and/or installation, and specifically excludes liability for direct, incidental, or consequential damages. As some states do not allow exclusions or limitation on an implied warranty, so the above exclusions and limitations may not apply. This warranty gives you specific rights and you may also have other rights that vary from state to state. Contact the Customer Service Team at 1(877)592-5233 or visit WWW.HOMEDPOT.COM/HUBSPACE.



Questions, problems, missing parts? Please call Hubspace Customer Service
8 a.m. - 7 p.m., EST, Monday - Friday and 9 a.m. - 6 p.m., EST, Saturday
at 1(877) 592-5233

WWW.HOMEDPOT.COM/HUBSPACE

Retain this manual for future use.

Safety Information

IMPORTANT SAFETY INSTRUCTIONS Read All Instructions (SAVE THESE INSTRUCTIONS)

WARNING: Inputting 24Vdc 1.25A for 1set of tape light. Do not connect more than 32.8 feet (2 pieces) of neon rope light to this single adaptor (24V 2.5A).	WARNING: Do not cover this product as the covering may cause the flexible light to overheat and either melt or ignite.
WARNING: Do not submerge the neon rope light in liquids or use the product in the vicinity of standing water or other liquids.	WARNING: Risk of Electric Shock. When used outdoors, install only to a covered Class A GFCI receptacle that has a weatherproof enclosure.
WARNING: Do not secure this product with staples, nails, or other sharp objects that may damage the insulation.	WARNING: When using outdoor portable lighting products, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following: • Use only three-wire outdoor extension cords that have three-prong grounding plugs and grounding receptacles that accept the appliance's plug. • Use ground fault circuit interrupter (GFCI) protection on the circuit(s) or outlet(s) when using outdoors. • Use only UL approved outdoor extension cords, such as type SOW, STW, STOW, SJW, SJOW, SJTW, or SJTOW. This designation is marked on the jacket of the extension cord. Receptacles are available having built-in GFCI protection and are able to be used for this measure of safety.
CAUTION: To avoid possible fire, product damage, or early lamp failure, this tape light should not be used in heat-producing appliances.	CAUTION: Do not route the cord or flexible light cable through walls, doors, windows, or any similar part of a building structure.
CAUTION: Do not operate tape light while coiled.	CAUTION: Do not subject flexible lighting to continuous flexing.
CAUTION: This product is rated for outdoor, wet locations.	CAUTION: Do not install near or around flammable or corrosive materials.
CAUTION: Do not install the neon rope light within 2.9 m/9.5 ft. of a pool or spa.	WARNING: Do not use if there is any damage to the light or cord insulation. Inspect periodically.

FCC Compliance Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Responsible Party: American Lighting Inc.

Address: 11775 E.45th Ave. Denver, CO 80239 Telephone Number: 1 800 880 1180

Connect the Smart Device

1 Let's Get Started!

- Download the **Hubspace™** app from the App Store or the Google Play Store to your mobile device.
- Launch the app.
- To register, enter your email address and a password. Or, log-in if you already have an account.
- Bluetooth access is required for device setup.

2 Verify Your Network

- This **Hubspace™** device requires a 2.4GHz Wi-Fi channel.
- Most routers provide a 2.4GHz Wi-Fi channel.
- Hubspace™** only shows Wi-Fi networks that your device can use.
- If you do not see your Wi-Fi network name when you attempt to connect your device, please check your router settings.

3 Add a Device

- In the **Hubspace™** app, tap the plus sign in the upper right corner.
- Scan your product's QR code. You can find a copy of the QR code on the device itself and in the Quick Start Guide.
 - Scan problem?*
 - If the QR code cannot be scanned for some reason, you can enter the code manually. Tap **Enter Code** and follow the instructions.
- Connect your device to power and follow the instructions on screen.
- If you are unable to access the QR code for your light, you can put it into discovery mode with the following sequence:
Switch the device OFF and ON 5 times. The light will pulse to show that it can now be discovered. In the **Hubspace™** app, tap the plus sign in the upper right corner and follow the instructions to discover devices. More than one device can be added at a time using this method.

4 Set up Your Voice Assistant


- In the **Hubspace™** app, tap the **Hubspace** button.
- Select the Integrations tab, choose your voice assistant and follow the instructions.

Installation

Layout Considerations


- Determine the desired location and length of the LED light strip needed for installation. If any cuts are need, follow "preparing the light strip" below.
- Lightly mark the beginning of run where the in-line controller (B) and plug-in power adapter (C) will connect to the tape. Make sure there is adequate room for the neon rope light(A), in-line controller(B), and plug-in power adapter(C) in this space and that plug-in power adapter(C) can reach an appropriate power receptacle without being pulled tightly.

CAUTION: To avoid damage to the light strip, do not twist the light strip or bend past the bend radius of 60 degrees.



1 Installing the light strip


- Carefully remove all the parts from the packaging, and lay them out on a smooth workspace. Remove the packing material and uncoil neon rope light(A) Be careful not to cut or nick the neon rope light(A).
- Connect the plug-in power adapter(C) to the neon rope light(A) by aligning and tightening the threaded connections points. Ensure the connection is tightly secured to preclude the entrance of water.
- Connect the plug-in power adapter(C) to the neon rope light(A) by aligning and tightening the threaded connections points. Ensure the connection is tightly secured to preclude the entrance of water. Turn on the product to test.

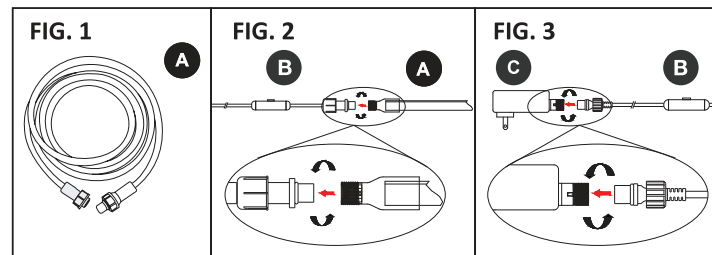

Operation

- When light is turned OFF, the in-line controller(B) will remember the last setting.


Connection schematic diagram

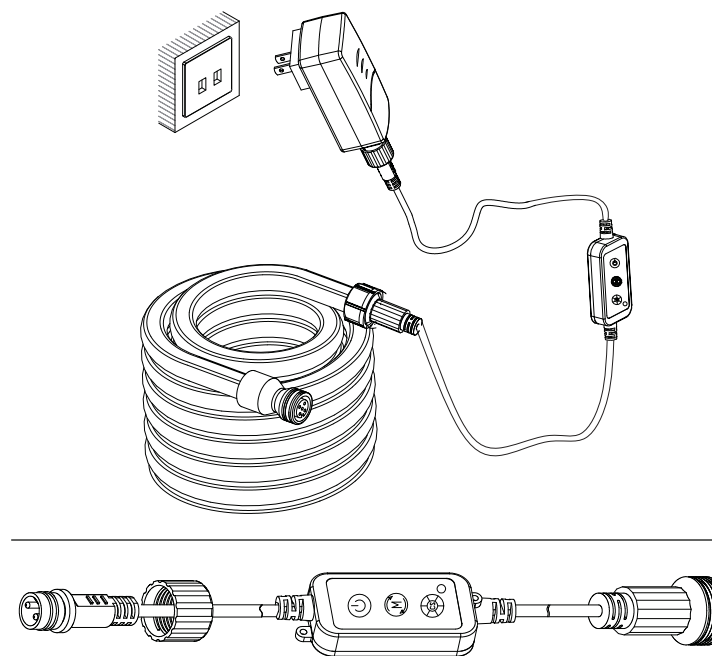

- Turn on/ Turn off Tape Light(Turn ON: last status)
- Preset modes selection
- Color Selection: 7-color Mix


Installation - Continued

- Attach mounting clips (D) using the mounting screws (E) onto a sturdy surface. Mounting clips (D) should be evenly spaced and be a maximum of 0.9m/2.95ft apart. The distance between two lines of neon rope light(A) must be at least 12 mm /0.47 in. The beginning of the neon rope light(A) run should be no more than 1.5m/4.92ft from the nearest power outlet.
- Snap the neon rope light(A) into the mounting clips(D).
- Plug the in-line controller(B) into the nearest outlet. Turn on the product to test. If installed outdoors, use a Ground Fault Circuit Interrupting (GFCI) outlet for safe operation.

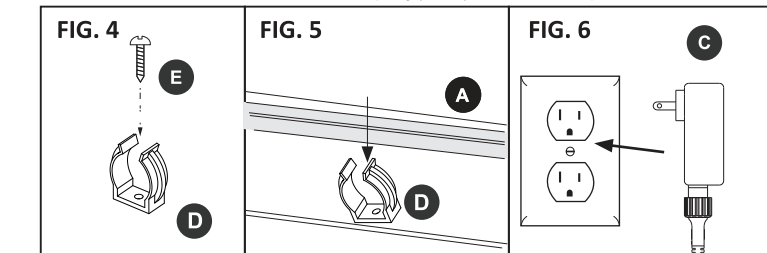

2 Linking the light strip

- Unplug all neon rope light(A) segments before adding an additional neon flex (A) segment.
- Remove the end cap from the last neon rope light(A) segment by unscrewing the plastic ring.
- Connect the extension segment of the neon rope light(A) to the last neon rope light(A) segment in the series by pressing the male and female ends firmly together, then tightening the screw-on connection. Ensure the connections are tight to preclude the entry of water. Do not connect more than two chasing neon flex segments together.

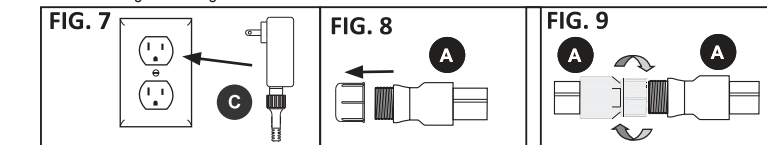

Troubleshooting

Problem	Solution
The tape light does not turn on.	<ul style="list-style-type: none"> Ensure the power adaptor is plugged into a live 120V receptacle. Check the connections and make sure the power adaptor wire is securely connected to the copper connections of the tape light. Check to make sure the plastic tab has been removed from the battery compartment on the back of the handheld remote control. Check to make sure the polarity of the batteries is correct. Check to make sure the batteries are not dead.
My Hubspace device is not connecting to Wi-Fi.	<ul style="list-style-type: none"> Make sure your device is connected to a power source. Your Internet connection or Wi-Fi network may be down. Check your router and internet connection.
My device cannot find any Wi-Fi networks.	<ul style="list-style-type: none"> Make sure you have a 2.4GHz capable Wi-Fi network within range of the device you are trying to add.
My device is in a location that does not have Wi-Fi. Can I still use it with the Hubspace app?	<ul style="list-style-type: none"> Yes: <ul style="list-style-type: none"> - Use the app on a phone with an Internet connection like LTE. - The phone must be within Bluetooth range of your Hubspace device.
I cannot find the QR code.	<ul style="list-style-type: none"> It is on the plug adaptor. A copy of the QR code is also included in your device's documentation.
The QR code has become damaged. How do I add the device?	<ul style="list-style-type: none"> Under the QR code are numbers. You can enter those numbers manually instead of scanning the code.
A device is on another account. How do I transfer it?	<ul style="list-style-type: none"> Scan the QR code and it will transfer to your account.
My device is offline for long periods of time.	<ul style="list-style-type: none"> Make sure your Wi-Fi signal strength is sufficient. You may need to move your router, use mesh Wi-Fi, or Wi-Fi extenders.
The device is on an I scanned the QR code, but the app cannot connect to it.	<ul style="list-style-type: none"> Turn off Bluetooth on your phone and turn it back on. Then, scan the QR code.
Can I scan the same QR code to add multiple products?	<ul style="list-style-type: none"> No. Each product has a unique QR code.