


1500Lbs 2Pcs Tri-Fold Loading Ramps

Product ID. QH6CU



Scan for Support
support@garvee.com

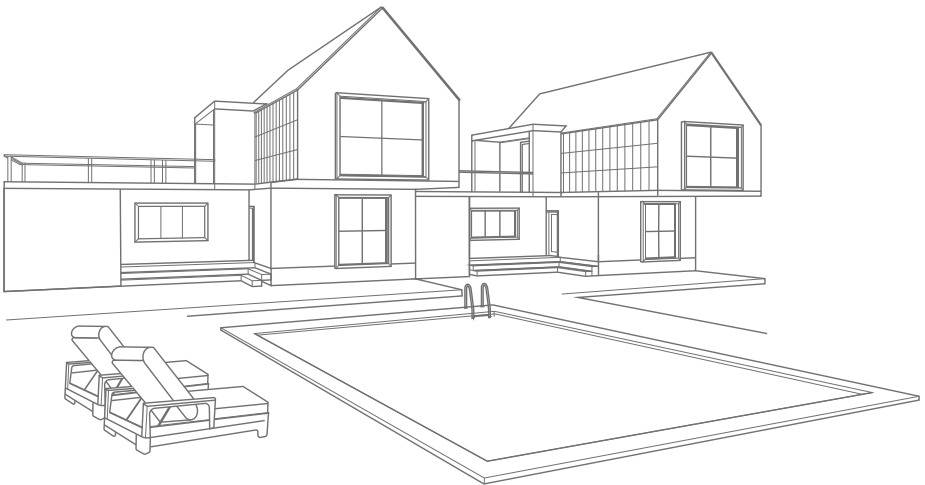

GARVEE.com

Owner's Manual & Safety Instructions

Save This Manual Keep this manual for the safety warnings and precautions, assembly, operating, inspection, maintenance and cleaning procedures. Write the product's serial number in the back of the manual near the assembly diagram (or month and year of purchase if product has no number). Keep this manual and the receipt in a safe and dry place for future reference.

ITEM 3250310

1,500LBS

Two Tri-fold Load

RAMPS



When unpacking, make sure that the product is intact and undamaged. If any parts are missing or broken,

⚠ WARNING

**Read this material before using this product.
Failure to do so can result in serious injury.
SAVE THIS MANUAL.**

Specifications

Capacity	1,500 lb. combined, 750 lb. individually (Static Conditions)
Max. Tailgate Height	36"

Important Safety Information

- Before use:**
 - Read and understand manual.
 - Inspect before every use; do not use if parts loose or damaged.
 - Turn vehicle's ignition OFF and set parking brake.
 - Clean dirt, oil and debris off ramps and allow ramps to dry.
 - Unfold ramps completely.
 - Set up only on solid, level, dry surface.
 - Turn ramps so flange end faces downward. Position ramps so that tongues fully contact tailgate.
 - Properly connect safety chains.
- Load and unload vehicle slowly. Do not ride vehicle up or down ramps.**
- Do not exceed 500 lb. capacity per ramp or 1,000 lb. capacity evenly distributed across two ramps. Be aware of dynamic loading! Sudden load movement may briefly create excess load causing product failure.
- Use safety chains as intended only.
- Use ramps as intended only. Do not use:
 - as ladder(s),
 - to load/unload 3-wheeled vehicles,
 - if tailgate on carrying vehicle is higher than 36", or
 - to load vehicle with wheel width wider than ramp.
- This product is not a toy.** Do not allow children to play with or near this item.
- Maintain product labels and nameplates. These carry important safety information. If unreadable or missing, contact us for replacement.
- All persons not involved in the loading process must stand clear of the loading ramps. Keep children away.** Children must not be allowed in the work area.
- Do not exceed tailgate weight capacity.
- Avoid working alone.** If an accident happens, an assistant can bring help.
- Keep work area clean and well lit.** Cluttered and dark areas invite injuries.
- Store idle equipment.** When not in use, store ramps in a dry location to inhibit rust.

13. **Dress properly.** Do not wear loose clothing or jewelry. Protective clothes and nonskid footwear are recommended when working. Wear restrictive hair covering to contain long hair.
14. **Wear ANSI-approved impact safety goggles, a safety helmet, and heavy-duty work gloves when loading, unloading or handling ramps.**
15. Keep proper footing and balance when loading or unloading.
16. Do not modify this product.
17. **Stay alert.** Watch what you are doing, use common sense. Do not use any ramp when you are tired.
18. **Check for damaged parts.** Before using any ramp, any part that appears damaged should be carefully checked to determine that it will perform its intended function. Check for any broken parts or mounting fixtures and any other condition that may affect proper operation. Any part that is damaged should be properly repaired or replaced by a qualified technician.
19. **Replacement parts and accessories.** When servicing, use only identical replacement parts. Use of any other parts will void the warranty. Only use accessories intended for use with these ramps.
20. **Do not use ramp if under the influence of alcohol or drugs.** Read warning labels on prescriptions to determine if your judgment or reflexes are impaired while taking drugs. If there is any doubt, do not use the ramp.
21. The warnings, cautions, and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.



SAVE THESE INSTRUCTIONS.

Assembly Instructions



Read the **ENTIRE IMPORTANT SAFETY INFORMATION** section at the beginning of this manual including all text under subheadings therein before set up or use of this product.

Note: For additional information regarding the parts listed in the following pages, refer to Parts List and Diagram on page 10.

⚠WARNING! In the following assembly process, the flange must face down with the Tongue (2) edge fully contacting the tailgate. It is designed to keep the Ramps from moving once the weight of the load is riding on the Ramps.

1. Line up the four holes on the Tongue (2) with the four holes on the Upper Ramp (3). Insert four Bolts (1) from the top and secure with Flat Washers (16), Spring Washers (15), and Nuts (14).

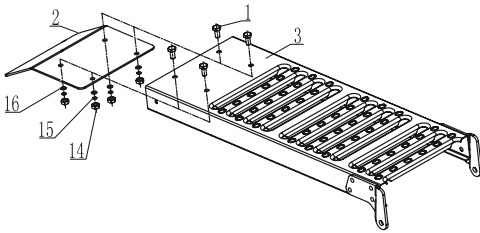


Figure A

2. Attach Safety Chain (13) to the side hole near the Tongue, using a Bolt (12), Flat Washer (11), and Lock Nut (10).

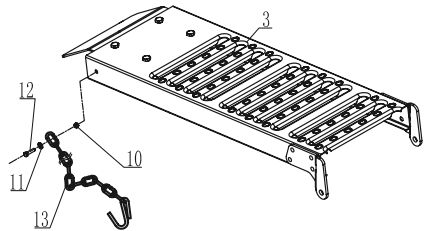


Figure B

3. Repeat with other Ramp.

Setup and Operation Instructions



Read the **ENTIRE IMPORTANT SAFETY INFORMATION** section at the beginning of this manual including all text under subheadings therein before set up or use of this product.

⚠ DANGER

TO PREVENT SERIOUS INJURY AND DEATH:

Before loading or unloading turn vehicle's engine off, set its transmission in gear or park, engage its emergency brake and block its wheels.

Make sure the Ramps are clean and dry before loading or unloading.

Setup

1. The tailgate the Ramps will sit on and both of the Ramps must be dry and clean. Check for and tighten any loose hardware.
2. Sit the Tongue (angled lip) of the Ramps on the tailgate. The Tongue must face down, and fully contact the truck's tailgate. Extend the Safety Chain on each Ramp up into the inside of the truck bed; attach each Safety Chain to a secure attachment point on the truck chassis.

WARNING! CONNECT SAFETY CHAINS TO SECURE ATTACHMENT POINTS WITHIN THE TRUCK BED ABLE TO WITHSTAND THE PULLING FORCE OF LOADING. THEY MUST ALSO BE TAUT ENOUGH TO PREVENT THE RAMPS FROM COMING OFF THE VEHICLE BEING LOADED.

3. Pull the Ramps backwards until the Chains are tight. The entire Tongue portion of the Ramps must fit onto the tailgate; if not, adjust the Safety Chains accordingly.

Chain Adjustment

1. Loop the chain through the anchoring point on the truck and hook it to itself.
2. Adjust the other chain to equal length.

4- Wheel ATV Loading and Unloading

⚠ DANGER

- These Ramps are for use with 2-wheeled dirt bikes and 4-wheeled ATV's only. Do not use these Ramps to load/unload 3-wheeled vehicles.
- Do not use these Ramps to load or unload any vehicle that weighs more than 1500 lb.
- Do not use these Ramps to load or unload any vehicle with wheel width wider than the Ramp.
- Do not use these Ramps to load or unload any vehicle that is carrying gear on its racks.
- Do not use these Ramps if the tailgate on the vehicle being loaded or unloaded is higher than half each Ramp's length (36").

WARNING! Riding an ATV while loading or unloading is dangerous and should not be attempted.

WARNING! Be aware of dynamic loading!

Sudden load movement may briefly create excess load causing the Ramps to fail.

WARNING! All persons not involved in the process must stand clear of the Ramps and truck. Make sure no pets are nearby.

Loading Using a Winch (not included)

1. The winch and mounting/connection points must all have appropriate capacity to pull the ATV up the Ramps safely.
2. ATV Mounted Winch Setup: Unwind cable from the winch and attach it to a secure mounting location on the truck, at the same height as the winch will be after the ATV has been loaded.
3. Truck Mounted Winch Setup: Attach the cable to the bottom front part of the frame.
4. While operating the winch, stand back and to the side of the ATV, with the vehicle between you and the winch cable.
5. Operate the winch to slowly load the ATV onto the vehicle.

Unloading

WARNING! Riding an ATV while unloading is dangerous and should not be attempted.

1. Have an assistant monitor the Ramp tongues for slippage on the tailgate.
2. Setup the Ramps on the truck bed as explained under operation. Remove all tie down straps and securing equipment from the ATV.
3. While staying off the ATV, start the engine, disengage the parking brake, put the transmission into reverse, and make sure the wheels are in a straight line with the Ramps. While holding the brake, position yourself in front of the ATV.
4. Release the brake and push on the ATV to get it started down the Ramps. Allow the ATV to roll down naturally, do not steer it or apply the brakes. If it stops while on the Ramps, gently give it throttle to back it off the Ramps.

WARNING! Be sure the 4-wheel ATV is centered on Ramps.

2-Wheel Dirt Bike Loading

1. Do not attempt to load any dirt bike or other 2-wheel motor bike alone. Have a qualified adult assist.
 2. Line up the 2-wheel dirt bike with one of the Ramps.
 3. With one person pushing the dirt bike slowly up the Ramp, a helper should be in the bed of the hauling vehicle both to guide and to apply the brake if it is necessary to stop the dirt bike while it is on the Ramp. Have one person with a hand on the dirt bike hand brake for safety.
 4. Once the person inside the truck bed has hold of the handle bars, apply the brake and steady the dirt bike while the other person moves behind the dirt bike (but off to one side) and pushes it all the way into the truck bed.
- NOTE:** While most dirt bikes are light enough to safely load with two people, a third person can make the job easier and safer.
5. Once the dirt bike is safely loaded, secure it with four tie down straps (not included), one on each side of the front, and one on each side at the rear of the dirt bike.

2-Wheel Dirt Bike Unloading

1. Position the Ramp against the truck tailgate behind the rear tire of the dirt bike and attach the Safety Chain to the truck bed.
2. Remove the tie-down straps (not included).
3. Slowly and carefully while using an assistant, push the dirt bike backwards until the back tire is at the top of the Ramp. With one person on the ground behind and to the side of the Ramp, slowly push the dirt bike onto the Ramp. Someone must always hold the hand brake.
4. Slowly work the dirt bike down the Ramp and onto the ground.

Maintenance and Servicing



Procedures not specifically explained in this manual must be performed only by a qualified technician.

⚠WARNING

TO PREVENT SERIOUS INJURY:

Remove the Ramps from the vehicle before performing any maintenance or service.

Do not use damaged equipment.

If Ramps are damaged, have the problem corrected before further use.

Cleaning, Maintenance, and Lubrication

- BEFORE EACH USE,** inspect the general condition of the Ramps. Check for:
 - loose hardware,
 - misalignment or binding of parts,
 - cracked or broken parts, and
 - any other condition that may affect its safe operation.
- Clean the Ramps after each use. Make sure any dirt, oil, grease, or debris are not on the Ramps.

PLEASE READ THE FOLLOWING CAREFULLY

THE MANUFACTURER AND/OR DISTRIBUTOR HAS PROVIDED THE PARTS LIST AND ASSEMBLY DIAGRAM IN THIS MANUAL AS A REFERENCE TOOL ONLY. NEITHER THE MANUFACTURER OR DISTRIBUTOR MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND TO THE BUYER THAT HE OR SHE IS QUALIFIED TO MAKE ANY REPAIRS TO THE PRODUCT, OR THAT HE OR SHE IS QUALIFIED TO REPLACE ANY PARTS OF THE PRODUCT. IN FACT, THE MANUFACTURER AND/OR DISTRIBUTOR EXPRESSLY STATES THAT ALL REPAIRS AND PARTS REPLACEMENTS SHOULD BE UNDERTAKEN BY CERTIFIED AND LICENSED TECHNICIANS, AND NOT BY THE BUYER. THE BUYER ASSUMES ALL RISK AND LIABILITY ARISING OUT OF HIS OR HER REPAIRS TO THE ORIGINAL PRODUCT OR REPLACEMENT PARTS THERETO, OR ARISING OUT OF HIS OR HER INSTALLATION OF REPLACEMENT PARTS THERETO.

Parts List and Diagram

Part	Description	Qty
1	M8x16 Bolt	8
2	Tongue	2
3	Upper Ramp	2
4	Middle Ramp	2
5	Lower Ramp	2
6	M10x25 Bolt	4
7	M10 Lock Nut	8
8	M10x40 bolt	4

Part	Description	Qty
9	Handle	2
10	M6 Lock Nut	2
11	M6 Flat Washer	2
12	M6 Bolt	2
13	Safety Chain	2
14	M8 Nut	8
15	M8 Spring Washer	8
16	M8 Flat Washer	8

Assembly Diagram

