

LEDone®

LLED 2FT U-Shaped Type A+B Multi CCT Tube Series

FEATURES

- Type A + B
- Low thermal decay & maintenance
- No Mercury, UV or Lead
- IP20 rated
- 50,000 hours lifetime
- NSF rated for food zone (non-contact), splash zone and non-food zone

CONSTRUCTION:

Glass with shatterproof coating. Frosted lens. G13 base.

OPTICAL SYSTEM:

Hongli 2835 LED chips. 220° beam angle and 340° field angle.

ELECTRICAL:

Available as 120-277V input. -20°C to 45°C, -4°F to 113°F.

INSTALLATION & MOUNTING:


Type A+B.

DIMMING:

This tube is able to be dimmed, work with an external 0-10V dimming module. Please contact Sales Rep for more information.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

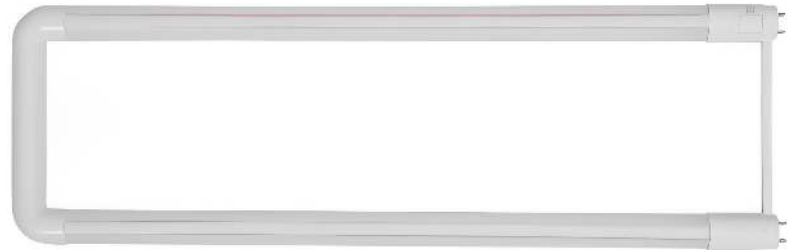

SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports



| MODEL NUMBER | WATTAGE | LUMENS | EFFICACY | CRI | POWER FACTOR | THD | REPLACES |
|-----------------------|---------|---------|----------|-----|--------------|-----|----------------|
| LO-LOC-T82FTU-15WMCCT | 15W | 1,980LM | 120LM/W | 83 | 0.9 | 20% | 32W/23T8/U6/RS |

LED 2FT U-Shaped Type A + B Multi CCT Tube Series

| Series | Type | Wattage | CCT Options | Power |
|--------|------------------------|---------|-------------------------|-----------------|
| LOC- | 2FTU = 2 Foot U-Shaped | 15W | 3500K 4000K 5000K | AB = Type A + B |

Measurements

