



OPERATING INSTRUCTIONS

Industrial 2000w Fan Heater



BEFORE OPERATION

CHECK THAT THIS UNIT HAS NOT BEEN DAMAGED IN TRANSIT AND THAT THE FAN OPERATES. THINK SAFETY!

MODEL: F3001RD

thank you

Thank you for the purchase of this quality **LLOYTRON** product. Used carefully and in accordance with the instructions enclosed, it should give you trouble free service over a long period of time. Please keep these instructions for future reference.

FEATURES

- Powerful, Efficient Heating & Cooling
- Three heat settings
- Cold Blow Option
- IP24
- Variable Thermostat
- Safety Thermal cut-out and Over Heat Protection
- On/ Off Indicator Light



SPECIFICATIONS

Operating Voltage: 220-240v ~ 50Hz
Power Consumption: 2000w



IMPORTANT SAFEGUARDS AND PRECAUTIONS

SAVE THESE INSTRUCTIONS

- Save these instructions.
- Read all instructions carefully
- For Household Use only. Not intended for commercial use.
- Only for use indoors.
- Do not use outside or in damp conditions.
- Before plugging into mains socket, check whether supply line voltage and current rating are in compliance with the rated electrical parameters shown on the rating label.
- Keep away from hot surfaces, such as gas or electric hobs and ovens etc
- Do not use for any purposes other than the appliances intended use.
- This appliance is not intended to be operated by means of an external timer or separate remote control system.
- To prevent damage to the mains cord, do not let it pass over sharp corners, edges or hot surfaces.
- If the supply cord is damaged, do not use. Check before each use!
- The supply cord cannot be replaced. If the cord is damaged the appliance should be scrapped.
- Do not use if any part of this appliance is damaged in any way.
- Always unplug when not in use.
- To prevent against the risk of electric shock, do not submerge any part of this appliance in water, unless advised in this manual.



- This appliance should only be used on a flat surface.
- Do not cover the appliance whilst in operation.


WARNING! To avoid overheating, DO NOT COVER the heater!

- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.
- Children shall not play with this appliance.
- Cleaning and user maintenance shall not be made by children without supervision.

- Do not use in bathrooms or in the vicinity of a bathtub, shower, or near a washbasin.
- Do not use near water.
- Do not use in vehicles.
- Do not use near combustible items, such as gasoline, paint, flammable liquids, clothes, furniture or curtains etc.
- Keep at least 50cm away from any wall or other objects, including people.
- Do not use this heater with a programmer, timer or any other device that switches the heater on automatically, since a fire risk exists if the heater is covered or positioned incorrectly.
- Always keep on floor.
- Do not use with extension lead unless rated at 15A or higher.
- Always check the product for transit damage before operation. If damaged, DO NOT USE!
- Caution should be heeded near hot surfaces on this appliance.
- Keep away from children.

LOCATION OF CONTROLS

1. Carrying Handle
2. Power Indicator
3. Thermostat Control
4. Fan & Heating Element
5. Heat Setting

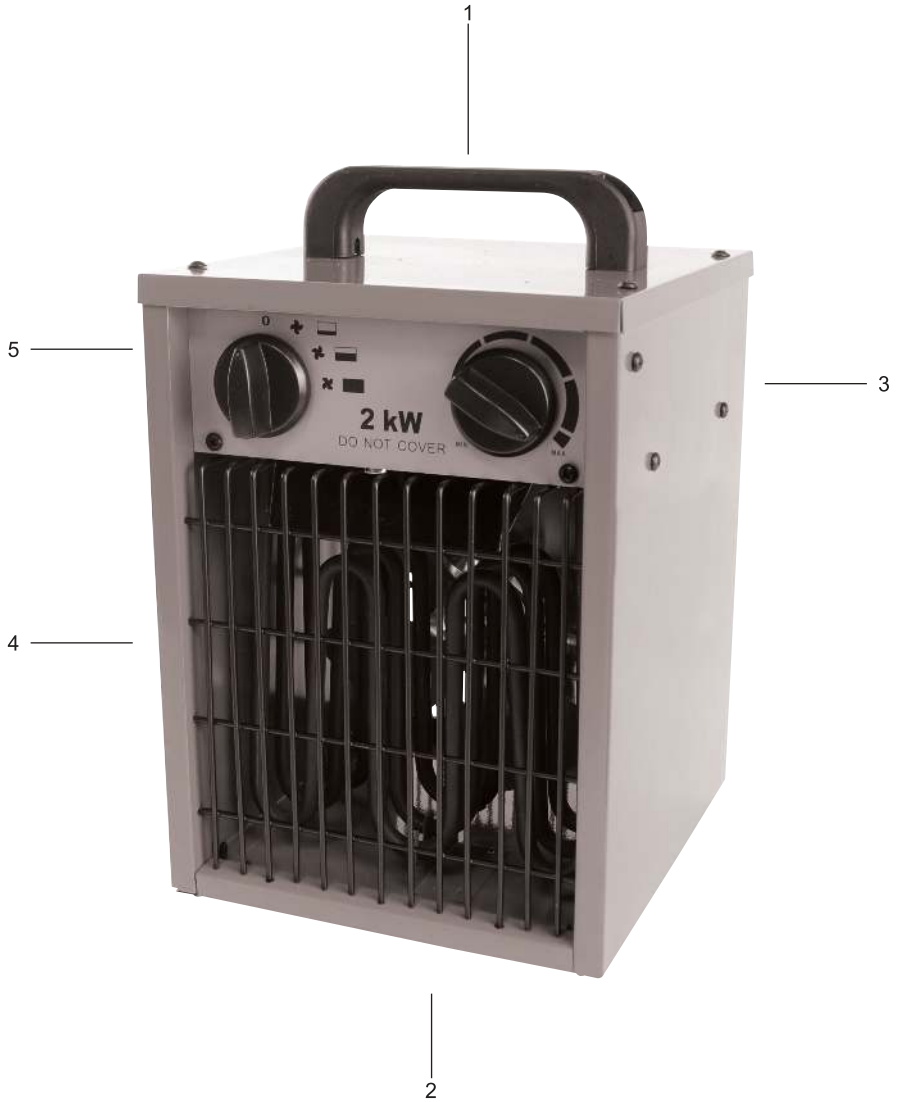


OPERATION

WARNING! First use may create smoke or vapour as protective oil on the elements is burnt off.

This is normal and will only last for approximately 10 seconds. The oil and vapour is harmless but it is recommended to keep away from sensitive skin!

1. Unpack the unit carefully
2. Plug the Mains Adaptor into any 220-240V ~ 50Hz AC mains outlet
3. Switch on the appliance by selecting different choices of ventilation and heating power.



- 0 = OFF
-  = Ventilation without Heating
- I = Low Heat
- II = Medium Heat
- III = High Heat

4. Then set the thermostat by means of the thermostat knob, which you can turn to the desired position.



The heater will keep the surrounding air at the set temperature by automatically switching 'ON' and 'OFF' at intervals. You may adjust the thermostat during use. To find the ideal thermostat setting for you; first set the dial to maximum position. As soon as the temperature is comfortable, turn down the thermostat (to direction of minimum position) slowly until the heater goes off.

OVERHEATING SAFETY

This unit has been provided with an overheating safety that turns 'OFF' the unit if there is a technical malfunction or if it is used wrongly. If this happens, you must;

- Switch off the heater and pull out the plug.
- Remove the cause or correct the malfunction.

After a short cooling down period, the overheating safety switches on automatically and the heater can be used again.

Note: You must always take care that there is sufficient distance for safety (at least 50cm) between the heater and the wall or the other objects. The airflow must not be impeded by anything.

CLEANING AND CARE

MAINTENANCE:

This appliance has been designed to operate over a long period of time with a minimum of maintenance. Continuous satisfactory operation depends upon proper care and regular cleaning.

WARNING! Before performing any maintenance or cleaning on this appliance, disconnect the appliance from the electricity supply.

MAINTENANCE:

1. Any ventilation slots should be occasionally cleaned with a clean, dry paint brush.
2. The exterior surface should be cleaned with a damp cloth only.

DO NOT USE STEEL WOOL, SCOURING PADS OR ABRASIVE CLEANERS ON NON-STICK SURFACES.


WEEE/ENVIRONMENTAL PROTECTION



Disposal of Electrical and Electronic Equipment

Do not dispose of this product with household waste. For the proper treatment, recovery and recycling please take this product to the appropriate waste collection point. If you are unsure where this may be, please contact your local authority. Improper disposal may be harmful to the environment.

UK PLUG REWIRING

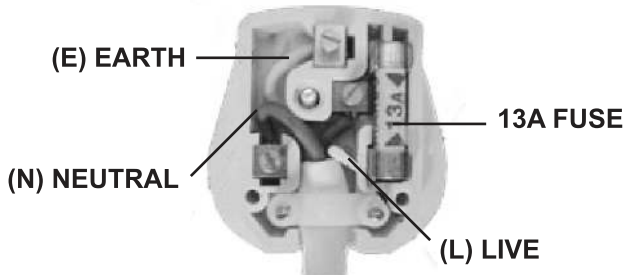


Your appliance operates on 220-240V~50Hz AC Mains and comes fitted with a 3-pin BSI Approved plug, so that it is ready for use by simply plugging into AC Mains. Should you need to change or refit a plug, proceed as follows: -

IMPORTANT:

The wires in the mains lead are coloured in accordance with the following code:

BLUE:	NEUTRAL (N)
BROWN:	LIVE (L)
GREEN AND YELLOW:	EARTH (E)

As the colours of the wires in the mains lead of this appliance may not correspond with the coloured markings identifying the terminals in your plug, proceed as follows:

The BLUE wire must be connected to the terminal which is marked with the letter "N" or coloured BLACK.
The BROWN wire must be connected to the terminal which is marked with the letter "L" or coloured RED.
The GREEN AND YELLOW wire must be connected to the terminal which is marked with the letter "E", the symbol  or coloured GREEN.

DO NOT CONNECT EITHER WIRE TO THE EARTH TERMINAL OF A 3-PIN PLUG

Always ensure that the Mains Cord is located into the Plug through the Cord Guard or Cable Clamp, and that the Cord Guard screws are tightened to clamp the Cord (outer sheath and inner coloured wires) in position in the Plug. Make sure the Plug top is also fitted securely.

The supply cord cannot be replaced. If the supply cord is damaged, the appliance should be scrapped.

This appliance must be protected by a 13 Amp fuse in a 13 Amp type (BS1363) plug. Should you need to replace the fuse, use only an ASTA approved BS1362 fuse.



LLOYTRON® CUSTOMER SERVICES

If you have any queries about this product, there are three ways to contact our customer service department:

call: 08454 81 8808

email: customerservice@lloytron.com

web: www.lloytronhelpdesk.com

To find more details on a wide range of Lloytron products please visit our website at www.lloytron.com
Lloytron plc, Laltex House, Leigh Commerce Park, Greenfold Way, Leigh, Lancashire, WN7 3XH. England, U.K