

FEATURES

- Excellent UV resistance
- Suitable for a multitude of uses
- Easy to thread and install
- Ideal for use outdoors

RS PRO Black Nylon Cable Tie, 142mm x 3.2 mm

RS Stock No.: 811-1486



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO cable ties are a type of fastener used for holding items together, most commonly electrical cables or wires. These cable ties are made from Nylon 66 (also known as nylon 6.6) and are weather resistant so can be used in outdoor applications. These ties are a one-piece, self-locking fastener and function like straps to keep cables tidy. They are available in a range of sizes. The design of a cable tie includes a head which provides the slot for the tape to be pulled through, to make a loop. The cable can be pulled through the slot until the preferred loop is achieved and then the excess cable can be cut off.

General Specifications


Type	Non-Releasable
Colour	Black
Material	Nylon66
Application	Bundling wire together, applications in industries such as: Cable management, Home/DIY, Garden.
Resistant To	Ultraviolet resistance
UV Resistant	Yes
Minimum Operating Temperature	-40°C
Maximum Operating Temperature	85°C
Fire Behaviour	Flame Retardant
Quantity	100

Mechanical Specifications

Length	142mm
Width	3.2mm
Tensile Strength	176.4N
Maximum Bundle Strength	34mm

Approvals

Standards Met	UL 94V-2
----------------------	----------

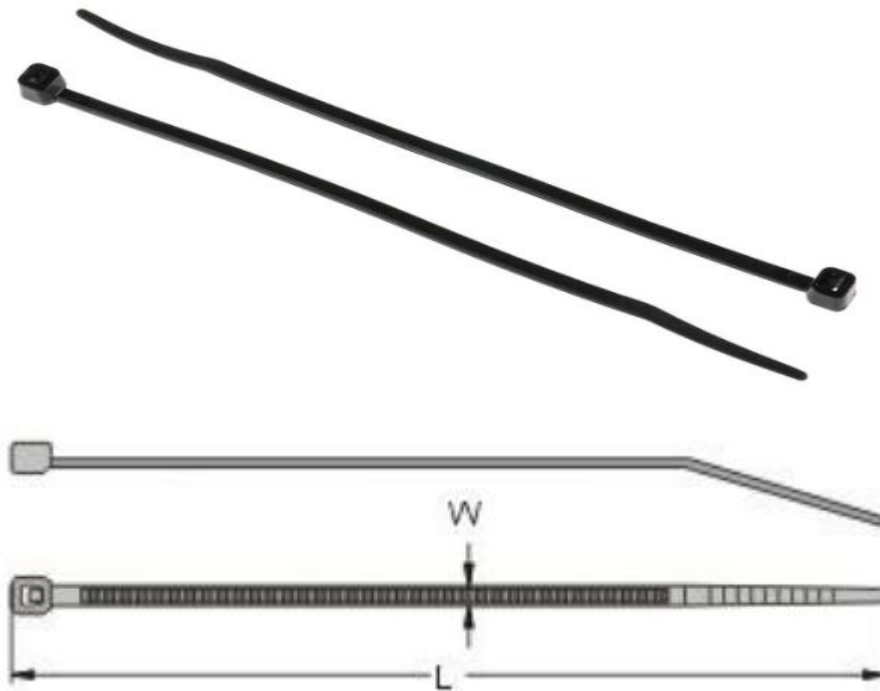

Unit : mm

Item No.	Length L		Width W	Max. Bundle Dia.	Min Loop Tensile Strength		packing
	mm	inch			lbs	kgs	
8111482	100	4"	2.5	22	18	8	100PC/BG
8111486	142	5 1/2"	3.2	34	40	18	
8111495	190	7 1/2"	4.8	49	50	22	
8111498	203	8"	4.6	52	50	22	
8111518	240	9 7/16"	7.6	61	120	55	
8111505	300	11 7/8"	4.8	83	50	22	
8111511	300	11 7/8"	7.6	80	120	55	
8111509	380	15"	7.6	105	120	55	
8111492	385	15 3/16"	4.8	110	50	22	
8111502	450	17 3/4"	4.8	131	50	22	
8111515	450	17 3/4"	8	128	120	55	
8111524	610	24"	9	177	175	80	
8111527	750	29 1/2"	7.5	223	120	55	