



**Installation Instructions: Standard tilt forward rear seat (1997-2002) TJ**  
**13463.XX**




**(Step 1 – Fig. A) Front Seat Brackets.**

Remove seat mounting bolts from the left and right side of the front floor behind the front seat risers. Do not mount bracket to floor yet. Install the front seat support brackets to the fold and tumble seat. Note that the bracket cutout should be facing away from the seat, and the floor mounting tabs are to point towards each other away from the fender . Install front seat brackets through seat mounting tabs as shown. Install the plastic bushing then the bracket followed by the C-clip to secure bracket to seat as seen in (Fig.A). Align mounting bracket over holes in floor and securely tighten with seat mounting bolts.

**(Step2 – Fig.B) Rear Seat Lock**

Remove seat belt anchor bolt from floor. Position lock underneath seat belt & eyelets as shown in (Fig.B). Please note that more than one hole is supplied to align the bracket with the floor mounting hole and seat lock. If desired an additional hole can be drilled and the bracket secured with two bolts. Grade 5 or higher bolt and large washer is recommended (supplied by customer). Reinstall seat belt anchor bolt through seat belt eyelets and seat lock. DO NOT TIGHTEN YET.

Align seat lock with striker so that seat locks when the seat is pushed down into position. Tighten seat belt anchor bolt. At this time a second hole, if desired, can be drilled and additional hardware added (supplied by customer).

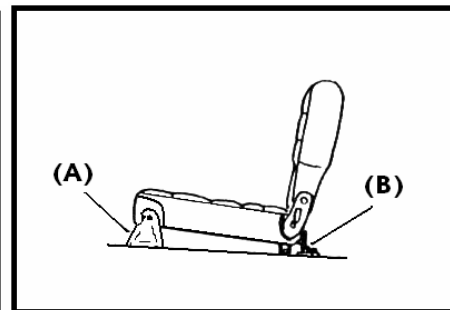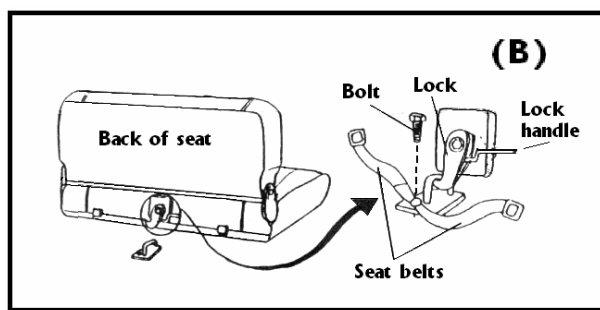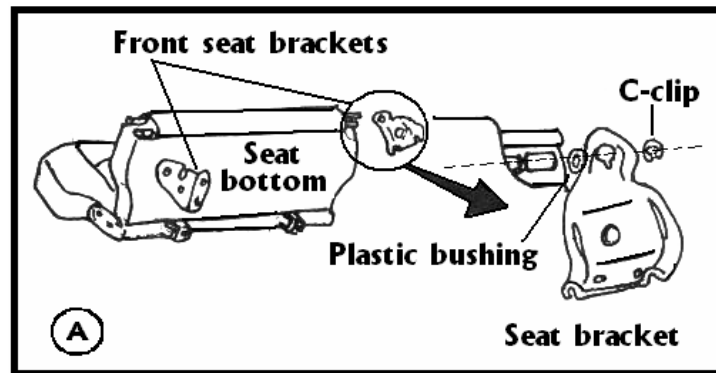

Made in China

