











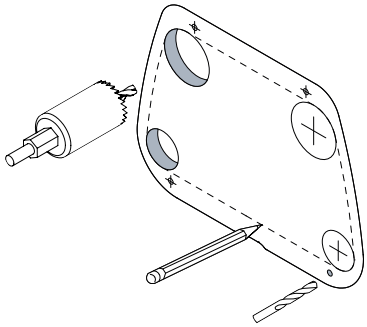
Part List	
	Pocket x1
	Countersunk screw x4
	Bezel x1
	Pan head screw x2

Tools Required		
	Jig Saw	
	Hole saw Ø20mm (0.79") Ø28mm (1.1")	
		<b>Optional drainage</b>
		 Ø5mm (0.2") Drill Bit
		 Drain tube Ø8mm (5/16")

Technical	
IP Waterproof Rating	IPX6 Front and back
Input voltage	10-30V DC (12/24V System)
Input current max	2A
Output power max	15W (9V 1.25A)
Standby power max	<1.2W
Certification	CE, UKCA, FCC, ROHS, C-Tick, UN ECE R10, E24, PSE Certified




READ THE IMPORTANT SAFETY INFORMATION LEAFLET BEFORE INSTALLING.



①

- Cut out template
- Mark the cutting boundary
- Use template to
  - Drill 4x pilot holes (see table)
  - Hole saw 2x
  - Hole saw 2x


---

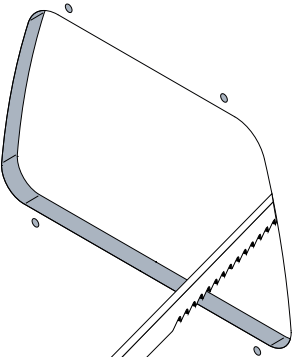

②

- Jig saw inside of the cutting boundary. DO NOT exceed the boundary area.

---

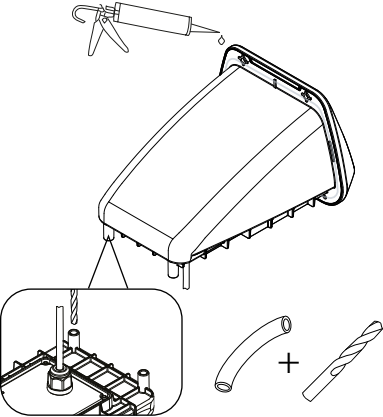


③

- Apply silicone sealant generously around flange, ensure good coverage around perimeter.

(Optional - Tools and parts not included).


- Install drainage on product.
  - Drain holes: Ø5mm (0.2") drill bit required.
  - Drain pipe: ID Ø8mm (5/16") required.

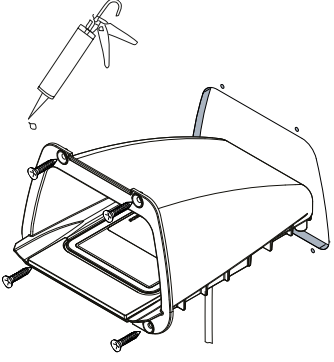

④

- Secure pocket in place using 4x countersunk fixings.
- Apply silicone sealant to fixings holes.


---

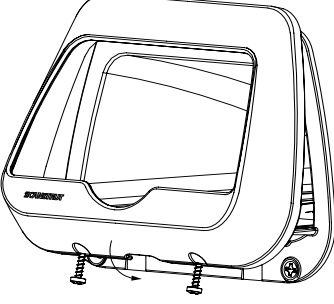

⑤

- Attach front bezel.
- Secure in place using 2x pan head fixings.

---

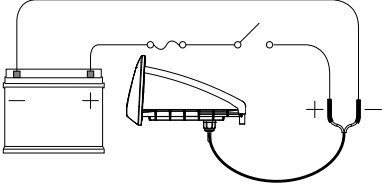

⑥

- Connect wires or connectors to 12/24V supply, ensuring a waterproof connection.
- Fuse according to input voltage and current.


Note: The electrical schematic is to illustrate how the product should be connected to a 12V DC or 24V DC battery/power supply.

**UK & International**  
 +44 (0)1392531280  
 sales@scanstrut.com

For further installation  
 and warranty information  
 please visit:  
 www.scanstrut.com

**USA**  
 +1 860 308 1416  
 usasales@scanstrut.com



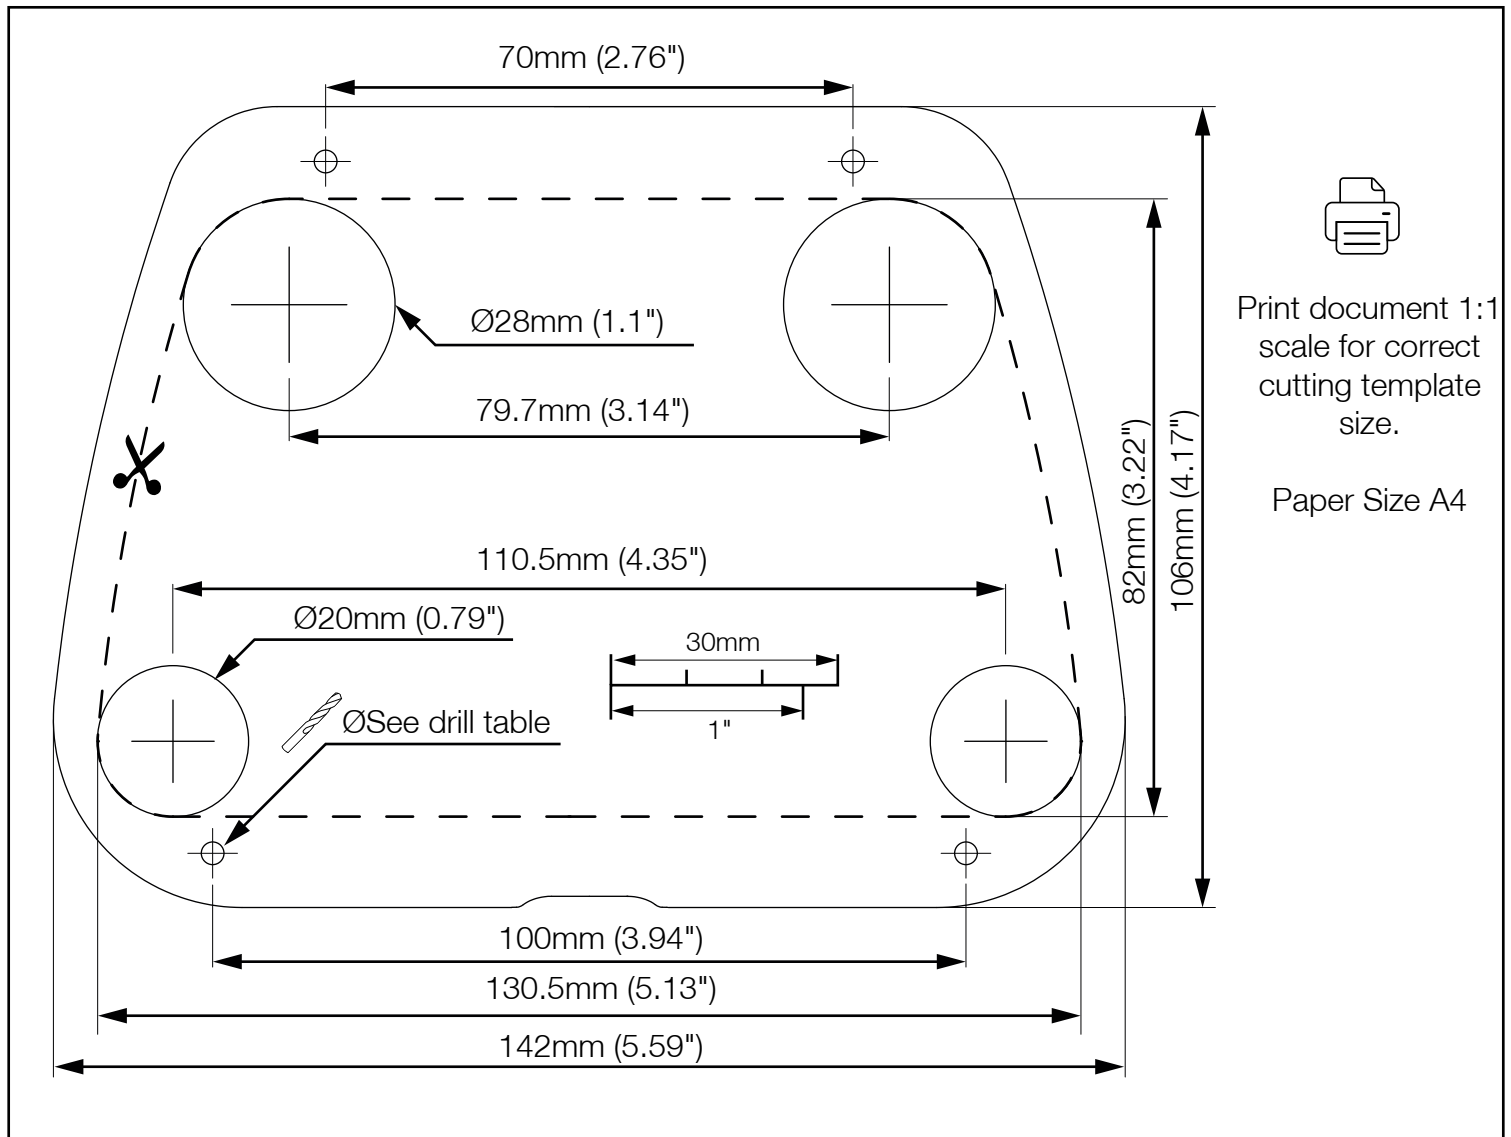

Print document 1:1  
 scale for correct  
 cutting template  
 size.

Paper Size A4

Drill table

Material	Drill	Fixing
Soft Material e.g. plywood	2.5mm (3/32")	No.6 Screw (Included)
Hard Material e.g. fiberglass, hardwoods, acrylics	3mm (1/8")	
Metal e.g. Steel, aluminium	3mm (1/8")	<u>Recommended</u> >12mm x M3 Countersunk Bolt with washer and Nyloc (Not included)

LED Charging indicator

- White LED Constant: ON Charge
- Red LED Constant: Standby (power ON)



Red LED Flashing:

Foreign object detection: metallic object placed on top that is not Qi compatible.

OR

Thermal cutout: The internal temperature is too high/ low. Wait for product to return to operating temperature.

UK & International  
 +44 (0)1392531280  
 sales@scanstrut.com

For further installation  
 and warranty information  
 please visit:  
 www.scanstrut.com

USA  
 +1 860 308 1416  
 usasales@scanstrut.com

