



Item#: **20755**
**LED 15W EMERGENCY
 PACK**

FOR LED INDOOR FIXTURES

FEATURES

- Kit includes; an LED emergency pack and test light indicator.
- Easy Installation - directly connect to AC Input of LED Fixtures.
- High voltage output
- Constant wattage delivery maintains illumination level for the full emergency runtime with no degradation
- Self test

APPLICATION

For use in LED Interior Fixtures with 0-10V dimmable drivers that are 100W or less, such as panels, troffers, downlights, linear lights, and high bays, that are in LED fixtures.

OUTPUT

Output Power	15W
Output Voltage	170V DC

INPUT

Input Power	12W Max.
Input Current	≤100mA Max.
Input Voltage	100-347V • 50/60Hz

PERFORMANCE

Emergency Time	90 Min.
Recharge Time Required	≥24 Hours
Battery Type	Lithium

ENVIRONMENT

Ambient Temperature	41° ~ 122°F
Suitable Location	DAMP
Max. Mounting Height	15.5FT

LIFESPAN

Warranty (Years)	2
------------------	----------

QUALIFICATIONS

Model Number	PQL-EMP-15
--------------	------------




Meets Standard(s) for Safety UL 924 • Specifications are subject to change without notice.

Item#: **20755**
LED 15W EMERGENCY PACK

DIMENSIONS (Inches)

Length	13.8"
Width	1.97"
Height	0.94"
Weight (Lbs)	--

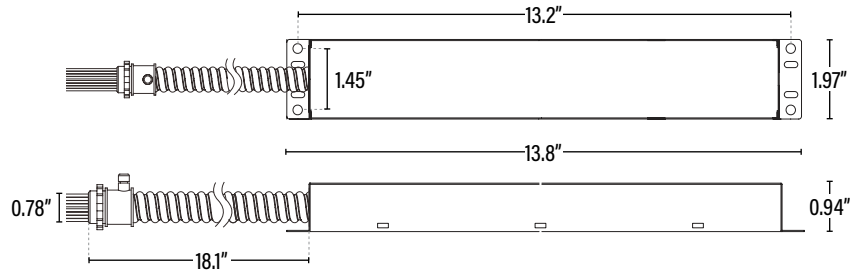

ITEM INFORMATION

PACKAGING

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	10	10899645001339	--	--
Individual Box	1	899645001332	18.1" x 6.3" x 2.3"	--
Country of Origin	China			
HS Tariff	--			

ORDERING Qualification Model # PQL-EMP-15

ITEM#	DESCRIPTION	TITLE 20	CASE
20755	EMERGENCY PACK FOR LED INDOOR FIXTURE 15W/90 MIN	Yes	10

ACCESSORIES

70755	IP65/M12 TEST LIGHT/BUTTON 2 in 1 FOR EMERGENCY PACK 00755/20755		1
39655	T-BAR MOUNTING KIT ACCESSORY FOR EMERGENCY PACK		50

ADDITIONAL INFORMATION:

- An un-switched AC power source is required.
- For use with LED 0-10V dimmable drivers that are 100W or less. Can also be used with non 0-10V dimmable LED Fixtures that do not exceed 15W.
- This device is designed for use in fixtures listed for dry and damp locations.