



- Easy Installation
- Non-dimmable
- No maintenance required
- Φ150mm Cutout size
- Ideal for replacing traditional CFL downlights



Order Code	66360
<b>General Data</b>	
Diffuser Type	PS
<b>Geometric Data</b>	
Height (mm)	38mm including driver
Diameter (mm)	Φ165mm
Cut-Hole (mm)	Φ150mm
Weight (g)	142g
<b>Electric Data</b>	
Wattage	16W
Voltage	220-240V
Power Factor	>0.5
Operating Frequency	TBC
<b>Photometric Data</b>	
Total Luminous Flux (lm)	1200 lm
CRI	>80
CCT	4000K – Cool-white
Luminous Intensity (cd)	460 Cd
Beam Angle (°)	110°
Lifetime(L70)	15000 hrs
Operating Temperature	-20-40°C



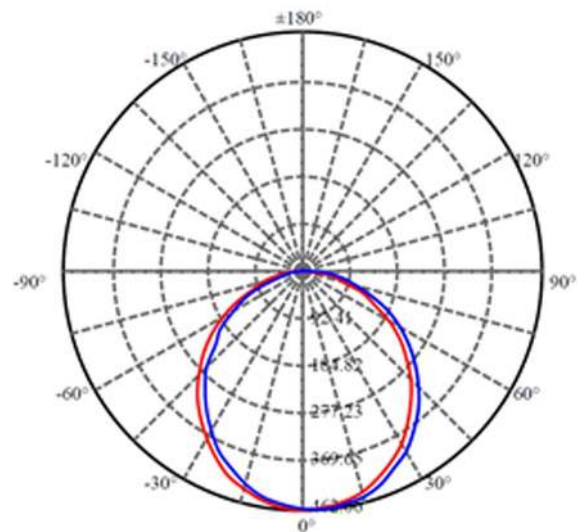

**Order Code**

66360

**Product Description**

LED recessed downlight 16W 4000K CW 1200lm 220-240V (150/165mm) open wire

**Technical Packaging Details**

Giftbox Barcode	4895117963609
Inner Carton Barcode	TBC
Outer Carton Barcode	24895117963603
Pack Dimensions (LxWxH)	165x165x44mm
Pack Weight	TBC
Carton Qty (Shipping Unit)	24
Carton Dimensions (LxWxH)	508x342x195mm
Cartons/Layer	TBC
Layers/Pallet	TBC
Units/Pallet	TBC