



- IP65 rated for outdoor installation, suitable for outdoor installation
- 5000K CCT
- Slim design, only 28mm thick
- Easy Installation
- Dedicated power cord outlet and power cord outlet stopper provided
- Wide input voltage range, 100-277V
- Long lifespan and little maintenances required
- More than 50% power saving compared to fluorescent tube
- Operating temperature -20°C to 45°C
- Lifetime of 40,000 hrs

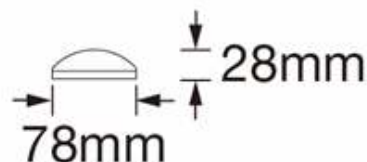

Polar intensity diagram

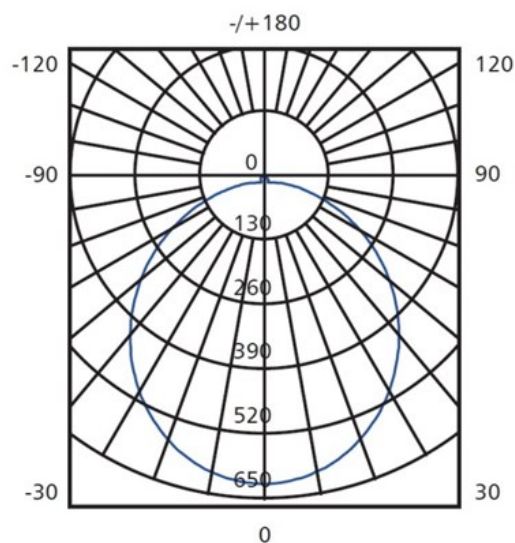

UNIT: cd
AVERAGE BEAM ANGLE(50%): 107.8 DEG

Order Code 65052

General Data

Design PC diffuser

Geometric Data

Height (mm) 600mm

Diameter (mm) 78mm

Cut-hole (mm) 28mm

Weight (g) 470g

Electric Data

Wattage 21W

Voltage 100-277 V AC

Power Factor ≥ 0.9

Operating Frequency 50/60 Hz

Photometric Data

Total Luminous Flux (lm) 1700lm

90° cone Luminous Flux (lm) N/A

CRI ≥ 80

CCT 5000K - Daylight

Luminous Intensity (cd) 640Cd

Beam Angle (°) 110°

Lifetime 40,000 hrs

Equivalent to (W)

N/A





Order Code

65052

Product Description

Verbatim LED IP65 Outdoor Linear Batten 21W 600mm
5000K 1700lm

Technical Packaging Details

Giftbox Barcode	4895117950524
Inner Carton Barcode	N/A
Outer Carton Barcode	24895117950528
Pack Dimensions (LxWxH)	628mmx86.5mmx40mm
Pack Weight	600g
Carton Qty (Shipping Unit)	25
Carton Dimensions (LxWxH)	680mmx480mmx250mm
Cartons/Layer	4
Layers/Pallet	3
Units/Pallet	300