

# Portable Monitor 18inch 2K 144HZ

## User Manual



In order to ensure your safe use of this product, please read this manual carefully before using this product and keep it properly.



Email: [upernectglobal02@163.com](mailto:upernectglobal02@163.com)



# Chapter 01 Preparations

## Checking the Package Contents



Portable Monitor



Power Adapter



Smart Cover



Mini HDMI to Standard HDMI Cable



Type-C to Type-C Cable \*2



User Guide

### Note:

- If any of the above items is damaged or missing, please contact us immediately. ([upernectglobal02@163.com](mailto:upernectglobal02@163.com))
- The appearance of the components may differ from the images shown.


## Installing the stand case

A




Step1: Place the holster as shown above, part "1" is magnetic.

B



Step2: Place the monitor as shown above, part "1" can be sticky.

C




Step3: Fold the Leather cases part "5" to part "4" as shown.

D



Step4: Stand up the monitor and adjust the angle

# Interface Function Introduction

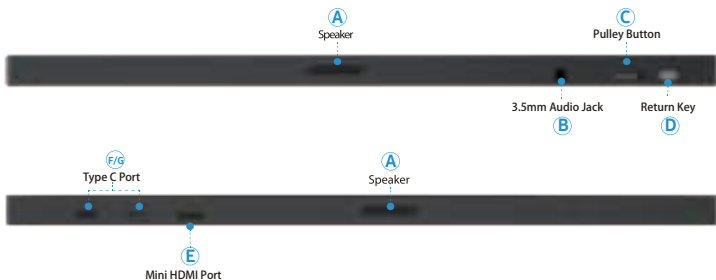

## A: Speaker

## B: Audio Port

Headphone/ Sound Box Extension Port.

## C: Pulley Button

Scroll the Pulley button up on the main interface to open the volume menu, then scroll up and down to adjust the volume.

Press the Pulley button to enter the OSD (On Screen Display) menu. Scroll the Pulley button up and down in the menu to control the cursor, and press the Pulley button to confirm.

D: Scroll the pulley button down without releasing it, the screen will turn on.

## Return Key

E: Press once to return to the previous step.

## Mini HDMI Port

F&G: For Audio and Video Signal Transmission.

## H: Type C 3.1 Port

Full featured type c port. For signal and power transmission.

## VESA


4 M4\*4mm holes.

# Chapter 02 Specifications


|              |                     |
|--------------|---------------------|
| Color        | Black               |
| Size         | 18 Inches           |
| Refresh Rate | 144Hz               |
| Resolution   | 2560*1600           |
| Color Gamut  | 100%DCI-P3          |
| Aspect Ratio | 16:10               |
| VESA         | M4*4mm              |
| Interfaces   | Standard HDMI Port  |
|              | Type C 3.1 Port * 2 |
|              | 3.5mm Audio Port    |
| Panel Type   | QLED                |
| Screen Type  | Matte               |

## Chapter 03 Connecting

### TYPE-C signal transfer

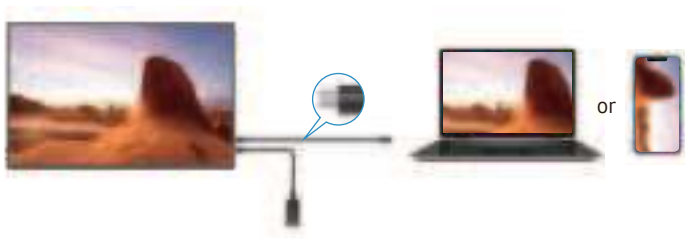

### HDMI signal transfer

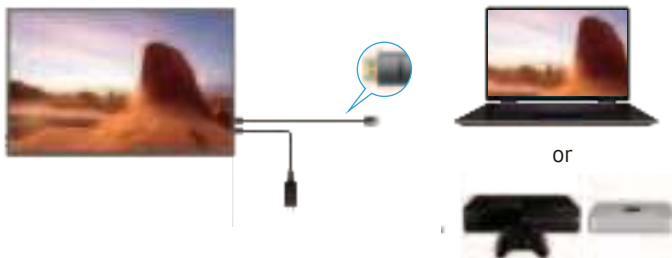

### For a stable connection:

1. Ensure the port and the cable is intact, plug and unplug gently to prevent loosening.
2. Use the original power adapter to avoid flickering.
3. If performance is poor despite a proper connection, test with another device.
4. If the port is loose or the screen is damaged, it may cause disconnection or flickering. Please contact customer service for a replacement.


# Chapter 04 Screen Adjustment

## On-Screen Display Menu Introduction


### BRIGHTNESS




### IMAGE

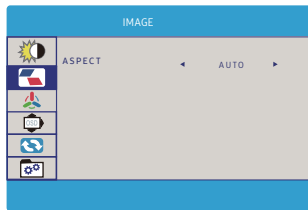


### COLOR TEMP

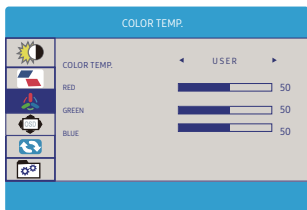

### OSD SETTING

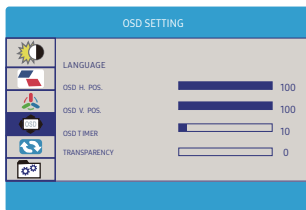

### RESET

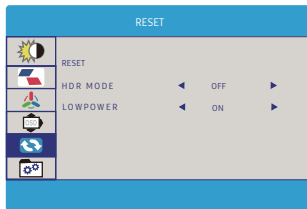

### MISC



# Chapter 05 Setting Up(Windows10)


## Extend Mode / Duplicate Mode/ Display Mode

### Way1: Set on the device's Display Settings

A: Verify that your cables are connected properly to the new monitors.

B: Right-click anywhere on your desktop and select Display settings to open the Display page.

C: Scroll down to Multiple displays, then select an option from the drop-down list to determine how your desktop will display across your screens. For the largest work area, select Extend desktop.

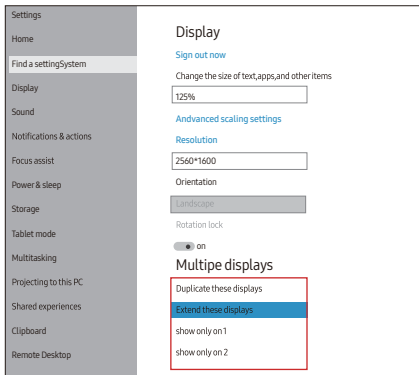


**Note:** If you cannot see the additional monitor(s) listed, click Detect. If does not work, try restarting your computer and do steps again.

## Way2: Set via Windows key + P keyboard shortcut

A: Enter the "Windows" key and "P" keyboard at the same time.

B: select an option from the drop-down list to determine how your desktop will display across your screens.

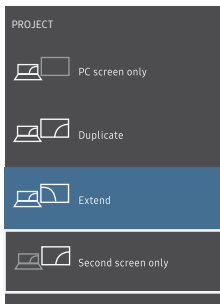


## Rotate the Screen

1: Right-click anywhere on your desktop and select Display settings to open the Display page.

2: Under the "Select and rearrange displays" section, select the monitor that you want to adjust.

3: Under the "Scale and layout" section, use the Orientation drop-down menu to select Landscape or Portrait screen.

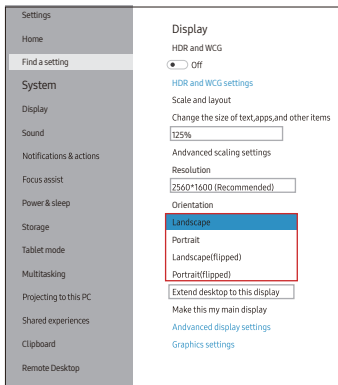

## Chapter 06 Q&A

### Important Tips:

If you have any issues with your monitor, contact us at [support@uperfectglob-al02@163.com](mailto:support@uperfectglob-al02@163.com) before returning it. We're here to help and ensure your satisfaction. If the problem can't be resolved, we'll offer a refund or replacement.

#### Q: Why won't my monitor turn on?

1. Check if your device's Type-C port supports power and signal transmission. If not, use an HDMI to Mini HDMI cable for video and a USB-C to USB-C cable for power.
2. The monitor requires at least PD 30W. Running at 2K 120Hz increases power consumption, so an external power supply is recommended.
3. If the issue persists, contact us.

#### Q: Why does it say "No Signal"?

1. Ensure your device supports USB 3.1/Thunderbolt 3. Otherwise, use a Mini HDMI to HDMI cable.
2. Use the original cables.
3. Try another device. If the issue remains, contact us for a replacement.

#### Q: Why does the monitor turn off when increasing brightness?

This is due to insufficient power. Use an external power supply.

#### Q: Why does the monitor turn off when increasing brightness?

This is due to insufficient power. Use an external power supply.

#### Q: What if I experience flickering, spots, or constant restarts?

1. Ensure sufficient power by using the original cable.
2. If using a power bank, make sure it provides at least 30W. Contact us if you need one.
3. If the issue persists after testing another device, reach out for a replacement.

# Chapter 07 Service Support

Dear Customer,

Thank you for purchasing the Portable USB Monitor!

We offer 100% money back guarantee in 30 days and 90 days replacement, 12 month warranty for any issue, professional tech support to ensure no-worry service.

Any query or problem, please contact us via [support@upperfectglobal02@163.com](mailto:support@upperfectglobal02@163.com)

