

Chapter 04 Connecting

Note: The port only for signal transmission, so an external power supply must be required to the monitor. For a more stable power supply, it is recommended to use our original DC adapter to power.

1.HDMI signal transfer



Note: The port only for signal transmission, so an external power supply must be required to the monitor. For a more stable power supply, it is recommended to use our original DC adapter to power.

2.DVI signal transfer



3.VGA signal transfer



Note: What if you want to connect a mobile phone or a computer without HDMI, DVI, VGA port? An adapter is required. In order to enhance our customer experience, you can contact us, we will send you for free.

Chapter 05 Screen Adjustment

1.Remote Control



Chapter 06 Q&A

Q: Why is the touch screen unresponsive or unusable?

A: 1. For computers/micro-host. Please check the connection first. Please use the genuine cable provided. In most cases, incorrect connection may cause the touch function to not respond. (Note: The touch cable must be connected to the computer host, not the power outlet.)
2. If the connection is correct, the touch function still does not respond. Please try another computer. If it fails, please contact us to replace the touch cable. (Note: For mobile phones, gaming devices (Nintendo, XBOX, PS4, etc.), the touch function does not respond.)

Q: Why does the touch function not respond when the monitor is set as the second monitor?

A: Please set the monitor as the primary screen. In extended mode, the touch function can only be used when the monitor is the primary screen.

Q: Why is there no touch function after HDMI connection?

A: Be sure to use the USB touch cable to connect the monitor and computer.

Q: The power indicator is on, but the screen is black or stuck.

A: 1. First, please use the original cables we provide and check whether the cables are available;
2. Second, please check whether there is video signal transmission;
3. Third, check whether the monitor is in the default extended mode. Please switch to the copy mode/mirror mode to display the picture.

Q: How to save the settings of brightness, volume, etc.?

A: When the HDMI port is used for a monitor and the monitor is powered by the DC-12V port, all settings will be saved automatically.

UPERECT


User Manual
15.6" Portable Touchscreen Monitor



Email: help@uperfect.com

Chapter 01 Preparations


Checking the Package Contents

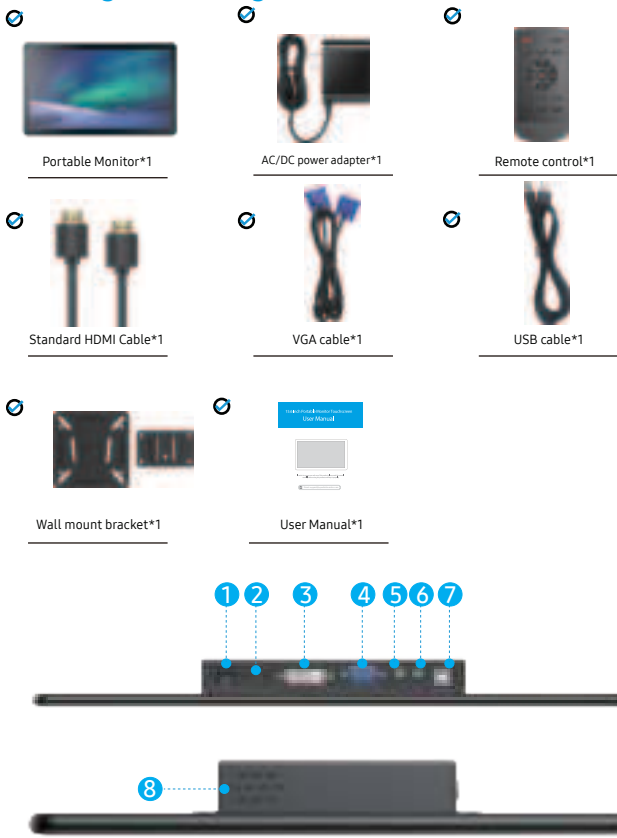

Product Appearance & Interface Function Introduction


- ① DC-12V Port**
Only for power supply. Use a DC power adapter to connect the DC-12V port and the outlet to power the monitor.
- ② HDMI Port**
Only for signal transmission.
- ③ DVI Port**
Only for signal transmission.
- ④ VGA Port**
Only for analog signal transmission.
- ⑤ AUDIO IN Port**
Input audio signals from computers, video recorders, etc., and play them through the built-in speakers.
- ⑥ AUDIO OUT Port**
Headphone/Sound Box Extension Port.
- ⑦ USB TOUCH Port**
Use a USB cable to connect the USB TOUCH port and computer to realize touch.
- ⑧ Speakers**
Built-in dual speakers 2*8Ω1W.

Chapter 02 Multi-Port Compatibility

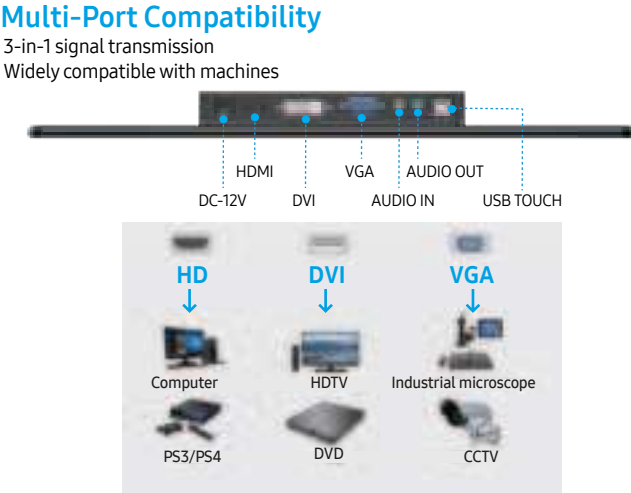


Screen Size	15.6 inches
Panel Type	IPS Screen
Resolution	1920*1080
Brightness	300 cd/㎡
Contrast Ratio	800:1
Refresh Rate	60Hz
Aspect Ratio	16:9
Color Gamut	100% sRGB
Color Depth	262K(6bit)
Interfaces	DC Port/ HDMI Port/ DVI Port/ VGA Port/ AUDIO IN Port/ AUDIO OUT Port/ USB TOUCH Port
Built-in Speakers	8Ω 1W * 2
VESA Hole Spacing	75*75mm
VESA Screw Size	M3*6mm


Chapter 03 OSD Set up




Press menu to enter screen setting. Choose "Picture"press "OK" enter picture setting. Press "UP" or "DOWN"to adjust brightness or contrast.



Press menu enter setting. Then press down to scroll and choose"COLOR", press "OK" enter color setting. You can adjust "Red", "Green", "Blue" to press up or down.



POSITION is default setting. The "Aspect Ratio" is 16:9



Choose "SETUP", press "OK" to choose "Language"
There are 12 languages to choose. "Signal Source" is default setting. Press menu to choose "Menu H-Position""Menu V- Position", "Menu Timer", "Audio Volume" and pressup or downto adjust.

Chapter 07 Service Support

Dear customers,
Thank you for purchasing a portable USB monitor!
We offer 30-day 100% money-back guarantee and 90-day replacement, 12-month warranty on any issues, and professional technical support to ensure worry-free service.
If you have any questions or issues, please contact us via:
help@uperfect.com

