



2515 Bypass Rd. Flemingsburg, KY 41041  
606-845-7439

**Instructions for Installation and Care of 2019 Polaris RZR  
Aero-Vent Polycarbonate Windshield  
PO-19RZR-WD05**

**NOTICE: Please check contents of package for any damage and make sure all parts fit correctly and you are happy with the product before removing protective film. Once the film is removed you cannot return the product for a full refund.**

Be sure to read these instructions thoroughly before opening and installing the 2019 Polaris RZR Polycarbonate Windshield.

1. Check over the parts included in the cartons with the parts list shown below:

Strap Clamps	4 each
1 3/4" Hex Head Bolts	2 each
Nylon Spacers	4 each
Lock Nuts	2 each
Plastic Slide Fasteners	7 each
46" Side Bulb Gasket	1 each
1/2" wide Adhesive Padding	36" Long
Vent Slider	1 each
Windshield	1 each

**If any parts are damaged or missing please contact customer service at (606) 845-7439.**


2. Start by pulling it out of the box and find a clean area to lay it down and install the hardware. Begin by peeling off the protective film. Next take the 46" piece of rubber gasket and starting at one end firmly place across the bottom of the windshield. You may need to trim any excess.
3. Next prepare the vent slider to be installed on the windshield. Take the two hex head bolts, 4 nylon spacers and two lock nuts and attach them to the vent slider as shown in the photos below.



Take the spacers and slide two of them over the bolt as shown below



Now insert the bolt in the small holes and screw on the lock nuts so the end of the bolt is flush with the outside edge of the lock nut. No need to worry about which side to install the handles on, it works both ways.

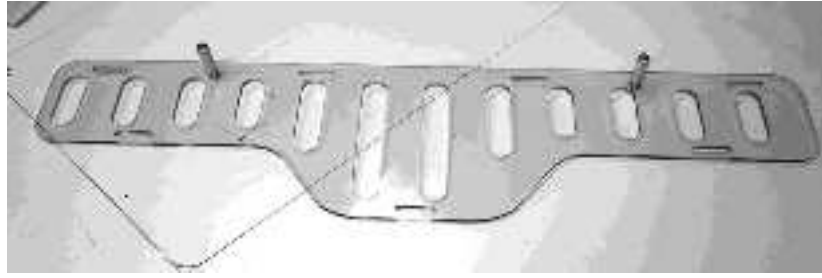

4. Now place the slider on the inside surface of the windshield which will be the side that the gasket bulb will be on. And place the plastic slide fasteners through the slots on the slider and into the holes in the windshield. The lock nuts should be in the large slots of the windshield.

5. Next take the adhesive padding and place it around the plastic piece on the RZR at the top of the roll cage. You will see a space where the windshield will sit in. This is where to place the padding. See photo below.



6. You are now ready to install the windshield on your roll cage. Place the windshield on the vehicle first. Then take the four Velcro clamps and place them through the square holes then wrap the strap around the roll cage and under the wire as shown in the photo below.



7. Then just Pull the strap back around the bar and attach it to the Velcro.
8. Now you are ready to take it out and enjoy. To clean the windshield, always clean using a liquid of some sort to decrease the chance of scratches. We recommend using micro-fiber cloths that are readily available at any dollar store. Any window cleaner will work fine; just remember to use a soft clean rag or micro-fiber cloth to clean it.

## Return Policy

If for any reason you choose to return this product it must be returned within **30 days from date item is received**. You **MUST** package the product exactly **as it was originally packaged from the factory to get a full refund for the product!**

The vinyl windows should never be folded when packaging in the box or for storage purposes. Lay all the windows on top of each other with the canvas folded in between and the paper (if available) on both sides of the windows.

**All returned products will be inspected upon arrival at the production facility and must be in unused, factory new condition to receive refund - a 25% restocking fee will apply.**

If ordered from Falcon Ridge please call at 606-845-7439 to gain a return authorization number, use our preferred shipping carrier (UPS) to return the item (unless the item is defective, you are responsible for paying the shipping to return the item.) **Any returns submitted to Falcon Ridge without a return authorization number will be charged a 20% restocking fee.** If ordered from one of Falcon Ridge's many distributors, you must first call them and see what their return policy is. Once your item reaches our production facility, our customer satisfaction team will inspect your item to ensure unused, factory new condition. **NOTE: All windshields must be returned with the original protective film intact and not removed. Do NOT REMOVE if you have any intentions of returning the item. Refund/ replacement of a windshield will only be processed on items with original protective film or if the windshield is defective.**

Items must be properly packaged in the original shipping carton to protect them during transit and ensure your returned item arrives back factory fresh, and in new resalable condition (**any returned items that have been used, altered or damaged in any way will not be subject for a refund.**) All contents including instruction manuals, accessories, hardware, Velcro, etc. must be included in your return shipment. Only items in OEM factory new condition will be approved. Once returned items are received, credit will be issued to the original credit card/ payment method used for the purchase. Outbound shipping and return shipping cost will not be refunded. Please allow 4 to 6 weeks for your refund to be processed.

## Warranty

To The Owner of this Product:

Thank you for purchasing one of Falcon Ridge's Cab Enclosures, Tops &/or Windshields! Below are the terms under which your product is covered under our manufacturer's warranty.

30 Day Warranty which includes and is not limited to replacing the enclosure, tops and/or windshield due to defect of the product. Please refer to the return policy in this case for more information.

1 Year Warranty includes any defect in material or workmanship within this time frame we will gladly correct the problem or replace the enclosure, tops &/or windshield. Upon submitting for the correction or replacement we will need to receive pictures of the defect in material or workmanship along with the receipt from the date of purchase.