



2 TONNE LONG REACH HIGH LIFT COMMERCIAL TROLLEY JACK MODEL NO: 2201HL

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.




Refer to instructions



Wear safety footwear

1. SAFETY

- ✓ Ensure the jack is in sound condition and good working order. Take action for immediate repair or replacement of damaged parts.
- ✓ Use genuine parts only. The use of unauthorised parts may be dangerous and will invalidate the warranty.
- ✓ Locate the jack in a suitable, well lit, work area.
- ✓ Keep work area clean and tidy and free from unrelated materials.
- ✓ Use jack on a level and solid ground, preferably concrete. Avoid tarmac as jack may sink in.
- ✓ Place suitable wheel chocks under wheels of the vehicle.
- ✓ Ensure the vehicle handbrake is engaged, engine is switched off and transmission is in gear (or "Park" if automatic).
- ✓ Ensure minimum distance of 0.5m between vehicle and static objects such as doors, walls, etc., to allow for vehicle tilting.
- ✓ Ensure there are no passengers in the vehicle.
- ✓ Ensure all non-essential persons keep a safe distance whilst the jack is in use.
- ✓ Only place jack saddle under those lifting points recommended by the vehicle manufacturer (see vehicle handbook).
- ✓ Check the lifting point is stable and centred on the jack saddle.
- ✓ Ensure the jack wheels are free to move and that there are no obstructions.
- ✓ Use suitable capacity axle stands under the vehicle before proceeding with any task.
- ✓ Ensure there are no persons or obstructions beneath the vehicle before lowering.
- ✓ Use a qualified person to maintain or repair the jack hydraulic system.
- ✓ When not in use store jack, fully lowered, in a safe, dry, childproof area.
- * is provides easy

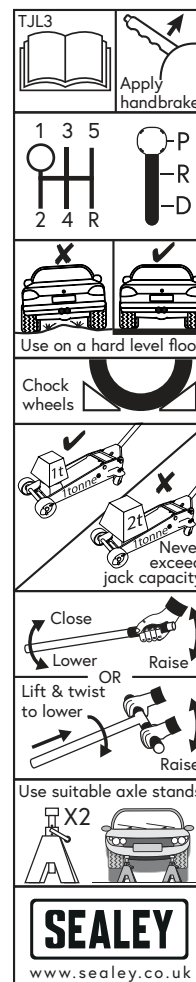

access to deep set jacking points. Fitted with onepiece hydraulic unit with builtin safety overload protection.

3. SPECIFICATION


Model No:..... 2201HL
 Capacity:..... 2000kg
 Length:..... 1350mm
 Maximum Saddle Height:..... 800mm
 Minimum Saddle Height:..... 140mm

4. ASSEMBLY

- 4.1. Loosen locating bolt at the side of the handle base. Push handle into socket and re-tighten locating bolt, ensuring that it fits correctly in the groove.

5. OPERATION

- **WARNING!** Before lifting ensure Safety instructions are read and understood.
- 5.1. **BEFORE FIRST USE**
 - 5.1.1. Before using jack for the first time, purge the hydraulic unit in order to eliminate any air in the system. Turn release valve control knob to open release valve.
 - 5.1.2. Pump for 30 to 40 seconds. When complete, close the release valve by turning the release valve control knob.
- 5.2. Place a few drops of hydraulic jack oil on pump piston and pump handle/pedal assembly several times to distribute oil. Thoroughly lubricate moving parts.
- 5.3. Rotate the release valve control knob at top of handle to either close or open the release valve.
- 5.4. To raise the jack with the release valve closed, either pump the handle or the foot pedal.
- 5.5. To lower the jack reverse the direction of the release valve control knob.

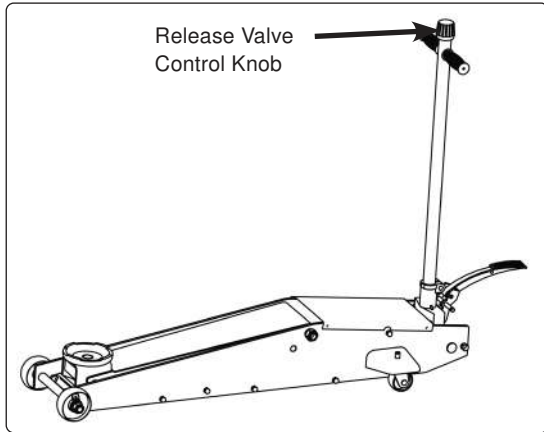

6. MAINTENANCE

- IMPORTANT:** Only fully qualified personnel should attempt maintenance or repair.
- 6.1. When the jack is not in use, the ram should be in its lowest position to minimise corrosion. Remove the handle to deactivate the jack.
 - 6.2. Keep the jack clean and lubricate all moving parts with acid free oil on a regular basis.
 - 6.3. **CHECKING THE OIL LEVEL**
 - 6.3.1. Pump the jack to approximately half height and with the help of another person, upend the jack (i.e. so that the ram is vertical and the jack is resting on the handle).
 - **WARNING:** Ensure that a second person remains to hold the jack stable in the upended position - **DO NOT** attempt this operation unaided.
 - 6.3.2. Remove the filler plug located on top of the ram. Correct oil level is just below the lower edge of the filling hole.

IMPORTANT: **DO NOT** overfill as this may effect the smooth operation of the jack.

NOTE: Use a good quality jack oil, such as SEALEY HYDRAULIC JACK OIL.

 - **WARNING:** **DO NOT** use brake fluid or any fluid other than hydraulic jack fluid, as this may cause serious damage to the jack and will invalidate the warranty!
 - 6.4. Before each use check for broken, cracked, bent, or loose parts, or any visible damage to ram, pump, saddle, lifting arm, frame and all parts including nuts, bolts, pins and other fasteners. If any suspect item is found remove jack from service and take the necessary action to remedy the defect. **DO NOT** use the jack if it is believed to have been subjected to abnormal load or shock load. Inspect and take appropriate action.
 - 6.5. After one year the oil should be replaced in order to extend the life of the jack. Drain and refill via the filler plug. Make sure that no dirt is allowed to enter the hydraulic system. See 6.3. for refill instructions.
 - 6.6. Periodically check the pump piston and the ram for signs of corrosion. Clean exposed areas with a clean oiled cloth.

7. TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	REMEDY
Jack will not lift the load	<ol style="list-style-type: none"> 1. Overloaded 2. Oil level low 3. Release valve not correctly closed 4. Air in system 5. Piston rod not functioning 6. Packing worn or defective 	<ol style="list-style-type: none"> 1. Use jack with adequate capacity 2. Top up oil 3. Check and close release valve 4. Open release valve and pump the handle a few times 5. Clean and replace oil 6. Replace packing
Jack does not lift high enough or feels spongy	<ol style="list-style-type: none"> 1. Oil level too high or too low 2. Worn seals 3. Air in system 4. Release valve not closed 	<ol style="list-style-type: none"> 1. Fill or remove excess oil 2. Return jack to local service agent 3. Open release valve and pump the handle a few times. Close valve and retry 4. Check and close release valve
Jack lifts poorly	<ol style="list-style-type: none"> 1. Pump packing or valves malfunctioning 2. Oil is dirty 3. Air in the system 	<ol style="list-style-type: none"> 1. Replace packing and/or replace valves 2. Replace oil 3. Open release valve and pump the handle a few times. Close valve and retry
Jack lifts but will not hold load	<ol style="list-style-type: none"> 1. Release valve partially open 2. Dirt on valve seats 3. Air in the system 4. Faulty seals 5. Packing worn or defective 	<ol style="list-style-type: none"> 1. Check and close release valve 2. Lower jack, close release valve. Place foot on front wheel and pull up lifting arm to full height by hand. Open the release valve to lower the arm 3. Open the release valve and pump the handle a few times. Close valve and retry 4. Replace or contact local service agent 5. Replace packing
Jack will not lower completely	<ol style="list-style-type: none"> 1. Unit requires lubrication 2. Piston rod bent or damaged 3. Jack frame/link system distorted due to overloading/poor positioning 4. Air in system 5. Release valve partially closed 6. Jack spring damaged 	<ol style="list-style-type: none"> 1. Oil all external moving parts 2. Replace rod or contact local service agent 3. Replace damaged parts or contact local service agent 4. Open release valve and pump handle a few times. Close valve and retry 5. Check and fully open release valve 6. Replace spring or contact service agent



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.



Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk